

PROJECT NAME

TYPE

QTY



## Screwless Step Lights

The Screwless Step lights can be used for any project, inside or outside. They fit the standard North American junction boxes and are offered in 100-120V, 24V or 12V. There are many trims options available to choose from.



<b>Colour Temperature</b>	2700k, 3000K, 4000K, 5000k RGB (low voltage only)
<b>CRI*</b>	90
<b>Lumen Output</b>	185,
<b>Lumen/Watt</b>	92lm/W


<b>Input voltage</b>	120V, 24V, 12V
<b>Consumption</b>	2W
<b>Dimming Options</b>	ELV Triac, 0-10V, DMX/DM, Zigbee & more options
<b>Material</b>	Aluminum housing and trim,

\*Please note this information is based off a 4000K LED Source.

\*Please note this information is based off a 4000K LED Source.

### Dimensions

\*Vertical and horizontal versions have the same dimensions

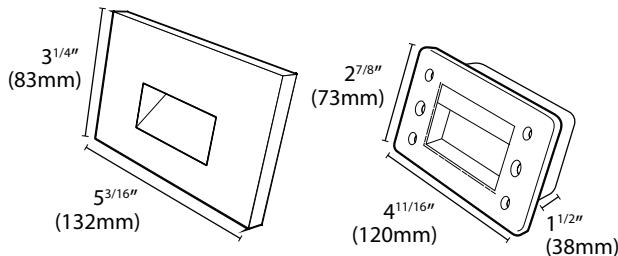

PROJECT NAME

TYPE

QTY

ORIENTATION



Horizontal

Vertical

COLOUR TEMPERATURE



2700K

3000K

4000K

5000K

RGB

TRIM COLOUR



Black

White

Chrome

Brushed nickel

Dark Brown

DRIVER



VOLTAGE



100-120V

24V

12V

# ORDERING OPTIONS

Screwless Step Lights

Example : LWSPL-HT-BK-24-30K-ELV1

<b>Orientation</b>	Horizontal - HT <input type="checkbox"/>	Vertical - VT <input type="checkbox"/>				
<b>Trim Colour</b>	Black - BK <input type="checkbox"/>	White - WH <input type="checkbox"/>	Chrome - CH <input type="checkbox"/>	Brushed Nickel - BNK <input type="checkbox"/>	Dark Brown - DBN <input type="checkbox"/>	
<b>Voltage</b>	100-120V - 120 <input type="checkbox"/>	24VDC - 24 <input type="checkbox"/>	12VDC - 12 <input type="checkbox"/>			
<b>Colour Temperature</b>	2700K - 27K <input type="checkbox"/>	3000K - 30K <input type="checkbox"/>	4000K - 40K <input type="checkbox"/>	5000K - 50K <input type="checkbox"/>	RGB (low voltage only) - RGB <input type="checkbox"/>	
<b>Driver (Low voltage only)</b>	On/Off - OO <input type="checkbox"/>	ELV triac 100-120V dimmable - ELV1 <input type="checkbox"/>	ELV triac 100-277V dimmable - ELV2 <input type="checkbox"/>	0-10V dimmable 100-277V - Z10 <input type="checkbox"/>	DMX/RDM dimmable 100-277V - DMXRDM <input type="checkbox"/>	Zigbee 3.0 dimmable 100-277V - ZG <input type="checkbox"/>

Other information

Notes |