


PROJECT NAME / No:  TYPE:  QTY:



LW6775 8.75W 573LM    LW6776 12.5W 938LM    LW6777 21W 1680LM    LW6778 29.8W 2235LM    LW6779 36W 2700LM

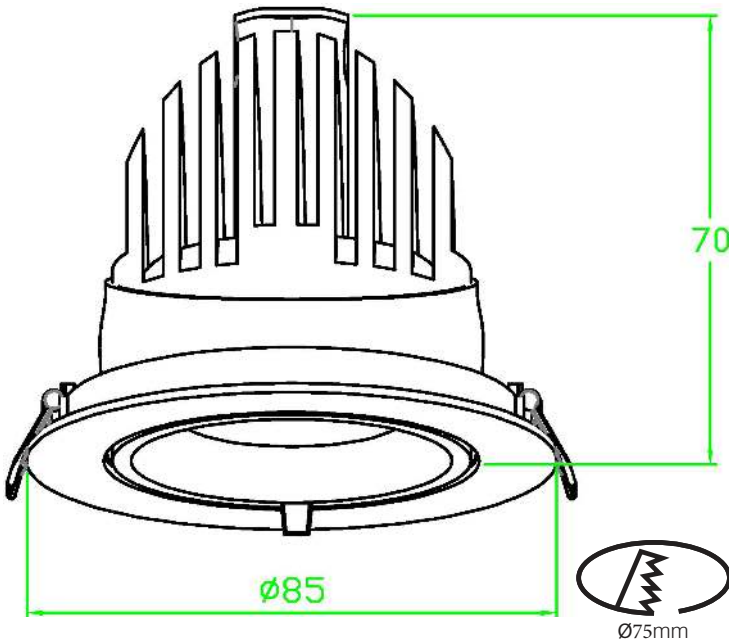

LED SOURCE TYPE	LUMILEDS CX PLUS SERIES:M02
CCT	30K, 35K, 40K OR DIM2WARM
CRI	92CRI
LOAD	8.75 WATT
WORKING VOLTAGE	32.5-37.5V
WORKING AMP	250mA
DELIVERD LUMEN	573LM
LM/W	65.5M/W
OPTIC	24/45 DEGREE
LENS OPTIONS	HONEYCOMB ANTI-GLARE DIFUSER
COMPATIBILITY	LUMEN WARM 0-10V DIMMABLE DRIVER OR INTELLIGENT DRIVER SERIES
CUTING SIZE	Ø75mm
PECULIARITY	ROTATES 350 DEGREE, TILTS 60 DEGREE
OUTSIDE FINISH	WH RAL 9016, GREY RAL 9006, BK RAL 9005
INSIDE FINISH	BLACK RING


TILTO




PROJECT NAME / No:

TYPE:

QTY:

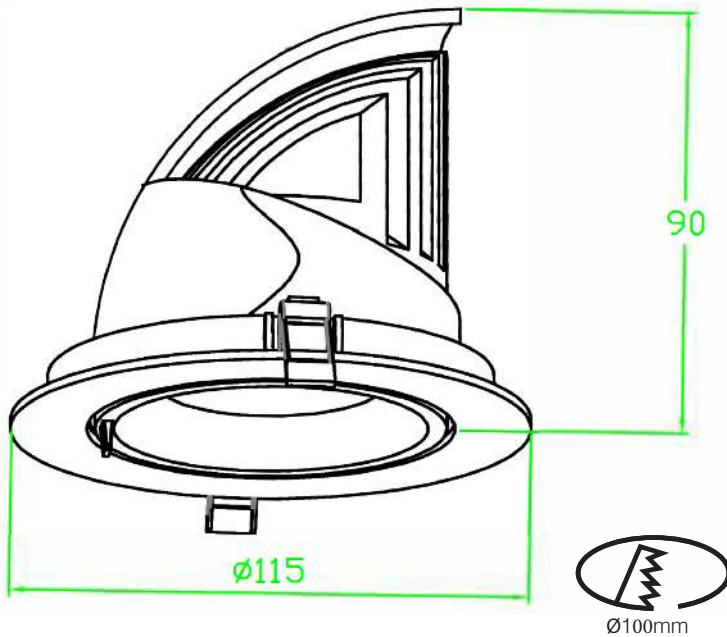

LED SOURCE TYPE	LUMILEDS CX PLUS SERIES:M03
CCT	30K, 35K, 40K OR DIM2WARM
CRI	92CRI
LOAD	12.5 WATT
WORKING VOLTAGE	32.5-37.5V
WORKING AMP	350mA
DELIVERD LUMEN	938LM
LM/W	75LM/W
OPTIC	15/24/38/60 DEGREE
LENS OPTIONS	HONEYCOMB ANTI-GLARE DIFUSER
COMPATIBILITY	LUMEN WARM 0-10V DIMMABLE DRIVER OR INTELLIGENT DRIVER SERIES
CUTING SIZE	Ø100mm
PECULIARITY	ROTATES 350 DEGREE, TILTS 60 DEGREE
OUTSIDE FINISH	WH RAL 9016, GREY RAL 9006, BK RAL 9005
INSIDE FINISH	BLACK RING

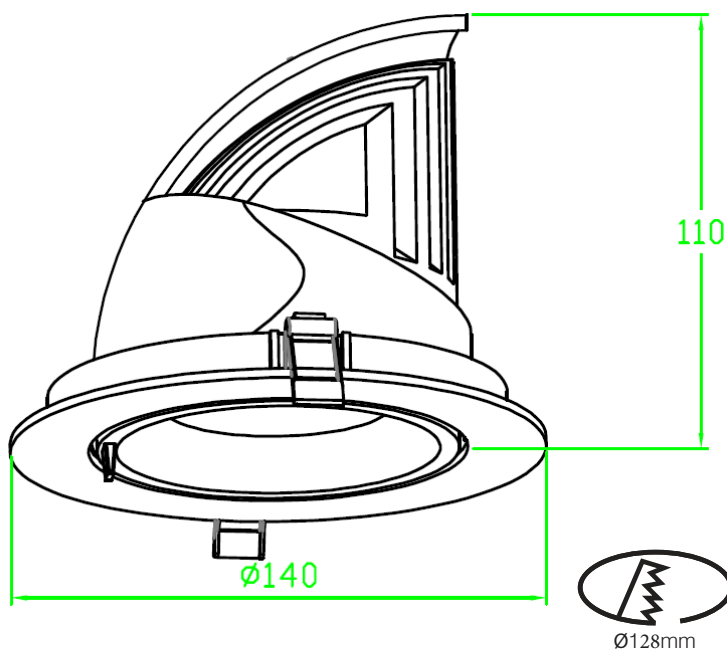


LED SOURCE TYPE	LUMILEDS CX PLUS SERIES:L04
CCT	30K, 35K, 40K OR DIM2WARM
CRI	92CRI
LOAD	21 WATT
WORKING VOLTAGE	32.5-37.5V
WORKING AMP	600mA
DELIVERD LUMEN	1680LM
LM/W	80LM/W
OPTIC	15/24/38/60 DEGREE
LENS OPTIONS	HONEYCOMB ANTI-GLARE DIFUSER
COMPATIBILITY	LUMEN WARM 0-10V DIMMABLE DRIVER OR INTELLIGENT DRIVER SERIES
CUTING SIZE	Ø128mm
PECULIARITY	ROTATES 350 DEGREE, TILTS 60 DEGREE
OUTSIDE FINISH	WH RAL 9016, GREY RAL 9006, BK RAL 9005
INSIDE FINISH	BLACK RING


PROJECT NAME / No:

TYPE:

QTY:

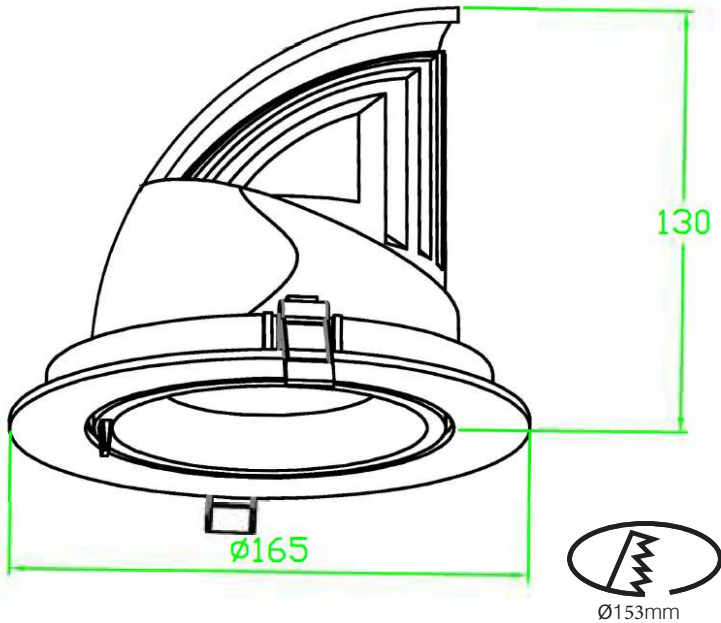

LED SOURCE TYPE	LUMILEDS CX PLUS SERIES:L08
CCT	30K, 35K, 40K OR DIM2WARM
CRI	92CRI
LOAD	29.8WATT
WORKING VOLTAGE	32.5-37.5V
WORKING AMP	850mA
DELIVERD LUMEN	2235LM
LM/W	75LM/W
OPTIC	15/24/38/60 DEGREE
LENS OPTIONS	HONEYCOMB ANTI-GLARE DIFUSER
COMPATIBILITY	LUMEN WARM 0-10V DIMMABLE DRIVER OR INTELLIGENT DRIVER SERIES
CUTING SIZE	$\varnothing 153\text{mm}$
PECULIARITY	ROTATES 350 DEGREE, TILTS 60 DEGREE
OUTSIDE FINISH	WH RAL 9016, GREY RAL 9006, BK RAL 9005
INSIDE FINISH	BLACK RING

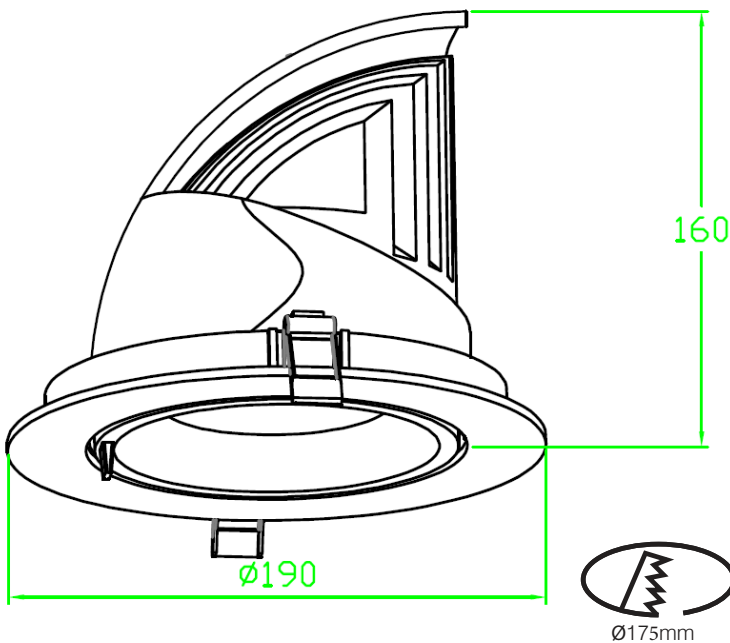

LED SOURCE TYPE	LUMILEDS CX PLUS SERIES:L08
CCT	30K, 35K, 40K OR DIM2WARM
CRI	92CRI
LOAD	36 WATT
WORKING VOLTAGE	32.5-37.5V
WORKING AMP	1000mA
DELIVERD LUMEN	2700LM
LM/W	75M/W
OPTIC	15/24/38/60 DEGREE
LENS OPTIONS	HONEYCOMB ANTI-GLARE DIFUSER
COMPATIBILITY	LUMEN WARM 0-10V DIMMABLE DRIVER OR INTELLIGENT DRIVER SERIES
CUTING SIZE	$\varnothing 175\text{mm}$
PECULIARITY	ROTATES 350 DEGREE, TILTS 60 DEGREE
OUTSIDE FINISH	WH RAL 9016, GREY RAL 9006, BK RAL 9005
INSIDE FINISH	BLACK RING