

LED extrusions solutions

A wide variety of customizable options

LUMEN
WARM


Available in a variety of light intensity and applications, our LED Profile Systems are **widely versatile**.

They can be used either for their **functionality**, as **design elements** in a room or both.




Lighting characteristics

Colour Temperatures

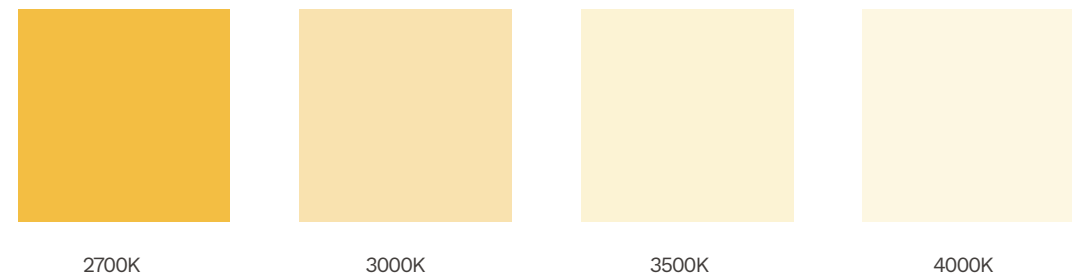

**Custom CCT upon request*

Lumen Packages

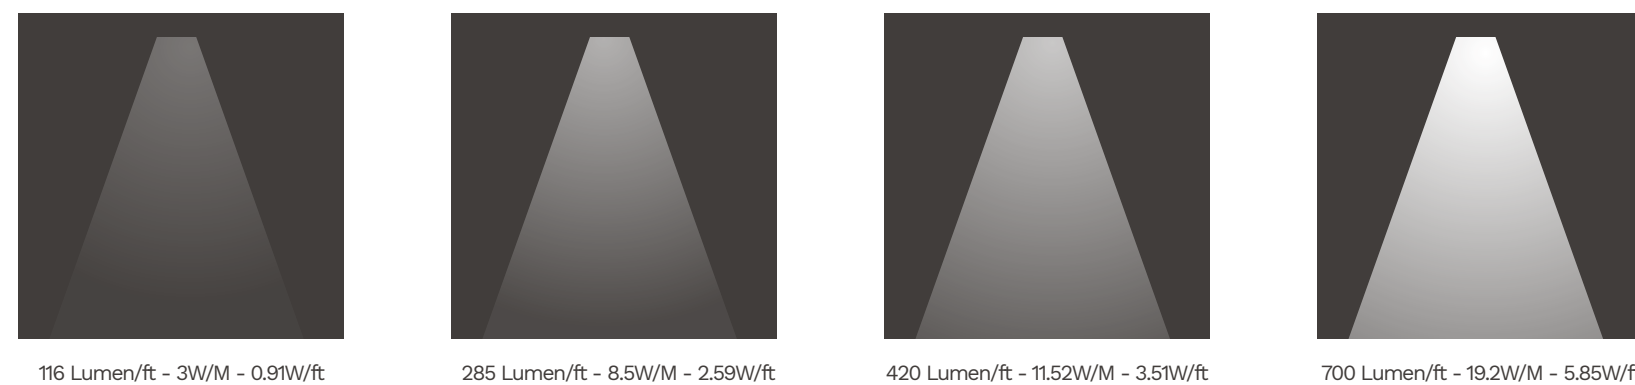

**Other lumen packages and configurations available*

IP ratings


IP20
RATED

IP44
RATED

IP67
RATED

LUMEN
WARM

- Longer life cycle than other similar products
- Industry leading efficiency of up to 130lm/W that provides drivers and energy cost savings
- High CRI standard of 95+, possibility to reach CRI of 98+
- Dot free visual using our extrusion line due to high LEDs density
- Long runs of up to 26M – 85ft* per 96W class 2 driver
**with high performance 3W/M – 0.91W/ft light source*

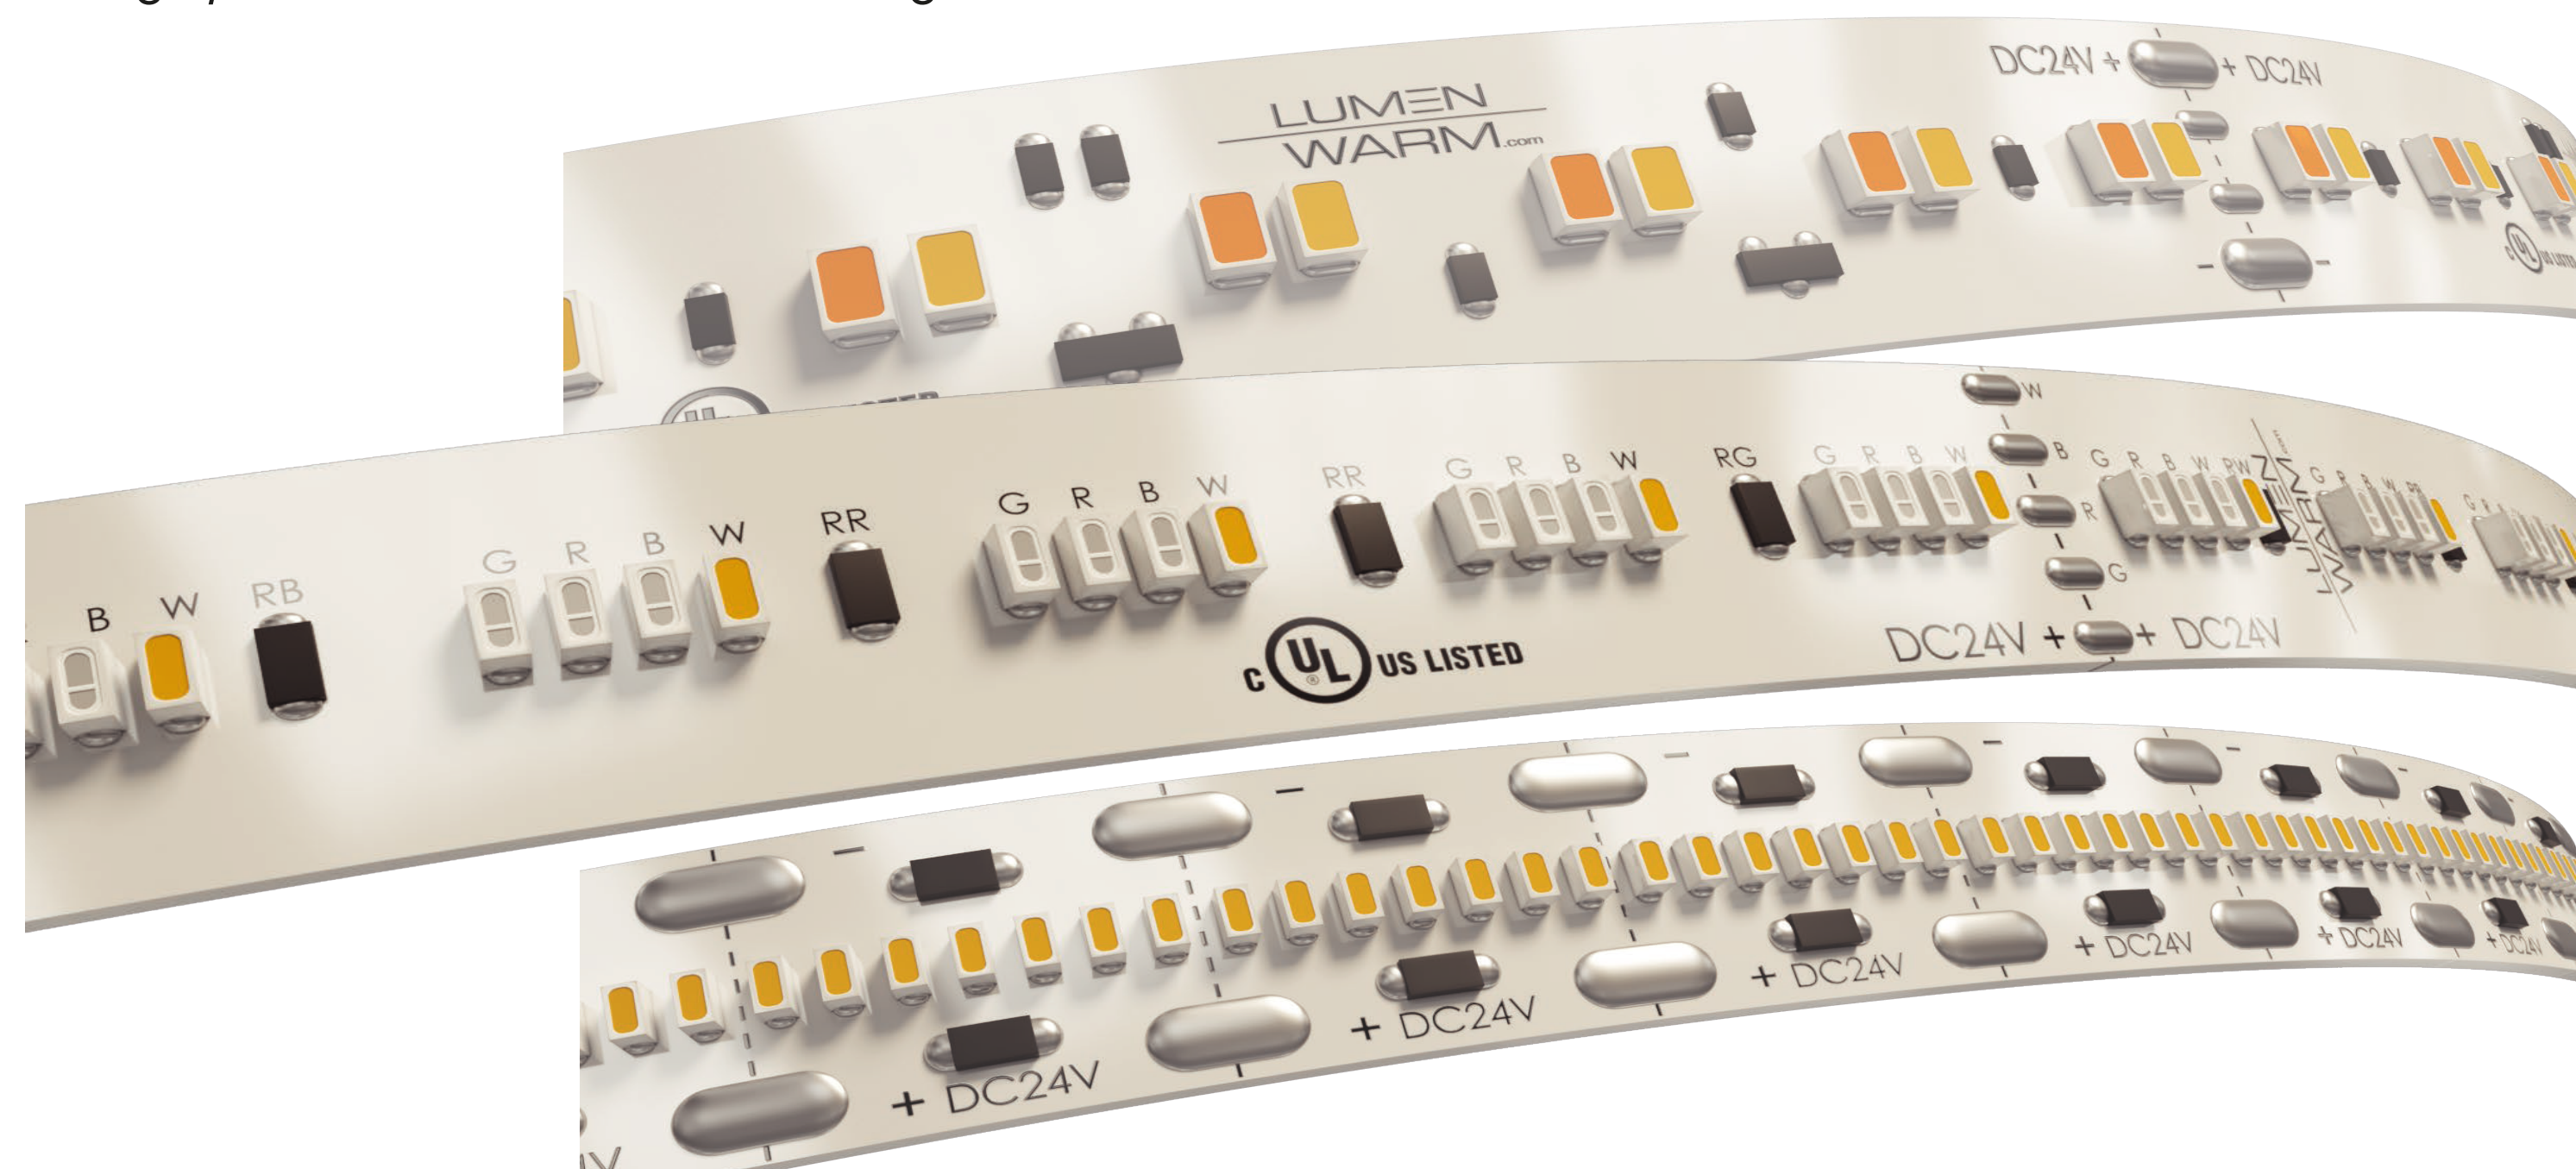

Lumen Warm's built in IC technology

Lumen Warm's built-in IC technology is an additional step in the manufacturing process of our LED tapes.

It consists of adding an electrical component that regulates the tension along our LED tape products. This technology allows longer runs by protecting the ribbon from voltage fluctuations. It also keeps a nice and steady luminous flux from one end of the run to the other.

IC Technology



LUMEN
WARM



LUMEN
WARM


Olivia



IP20
RATED

IP44
RATED

Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

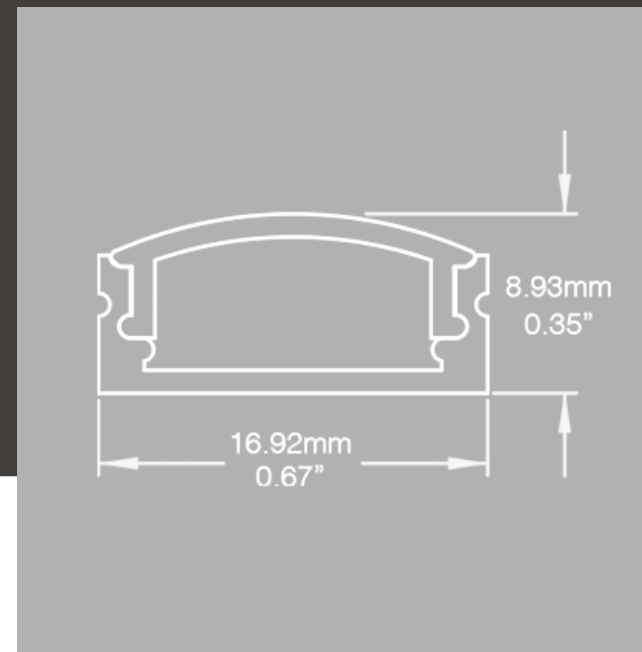

Dimensions

Thin | discreet | economic | easy to install | field cuttable or ready to install

Lenses




clear frosted



white frosted



white opal



white opal 3D


Installation

Surface mounted /
in groove with clips or double sided tape

Application

Cove lighting, under cabinet, woodworks

**3M
Tape**



Clear Anodized



Custom

LUMEN
WARM


Build your Olivia



LUMEN
WARM




Doby

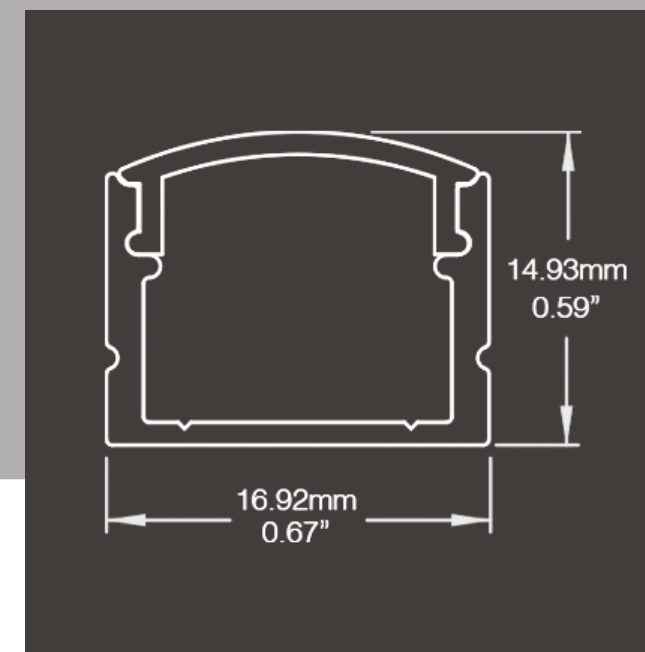

Dimensions

Thin | discreet | versatile | optimal diffusion | easy to install | field cuttable or ready to install

Lenses

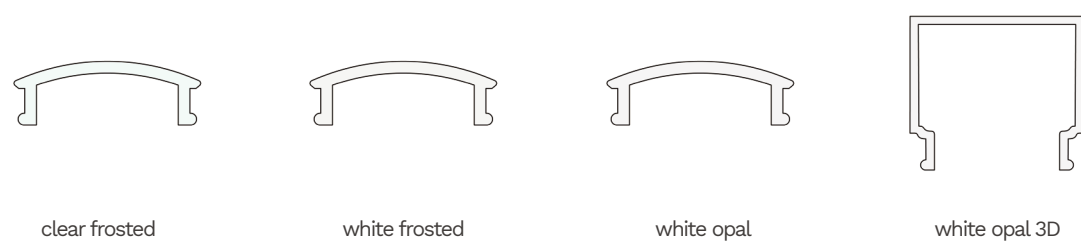


Installation

Surface mounted /
in groove with clips or double sided tape

Application

Cove lighting, under cabinet, woodworks,
outdoor applications

3M
Tape



Clear Anodized



Custom

LUMEN
WARM

Build your Doby





LUMEN
WARM

Robertha




IP20
RATED

IP44
RATED

Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

MADE IN


5
year
warranty

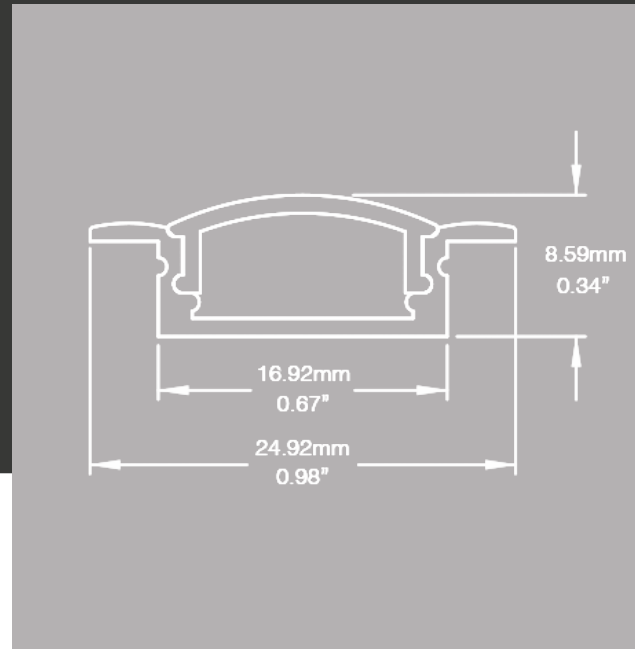

Dimensions

Thin | discreet | economic | easy to install | field cuttable or ready to install

Lenses



clear frosted



white frosted



white opal


Installation

Recessed / in groove with clips
or double sided tape

3M
Tape

Application

Small recessed application,
under cabinet, woodworks, shelves



Clear Anodized



Custom

LUMEN
WARM

Build your Robertha





LUMEN
WARM


Connor



IP20
RATED

IP44
RATED


Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

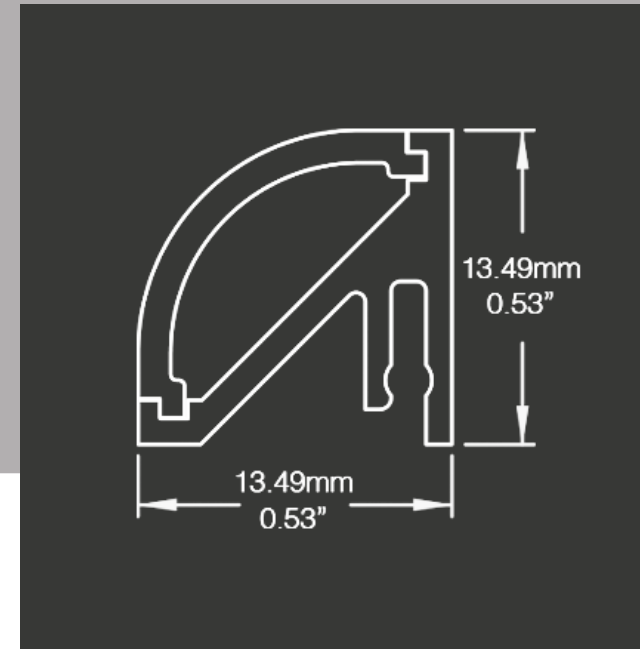


Dimensions

Small | discreet | invisible mounting | easy to install | field cuttable or ready to install

Lenses



clear frosted



white frosted

Installation

Surface mounted with invisible bracket
or double sided tape

Application

Corner application, cove lighting,
under cabinet, woodworks

3M
Tape




Clear Anodized



Custom

LUMEN
WARM

Build your Connor

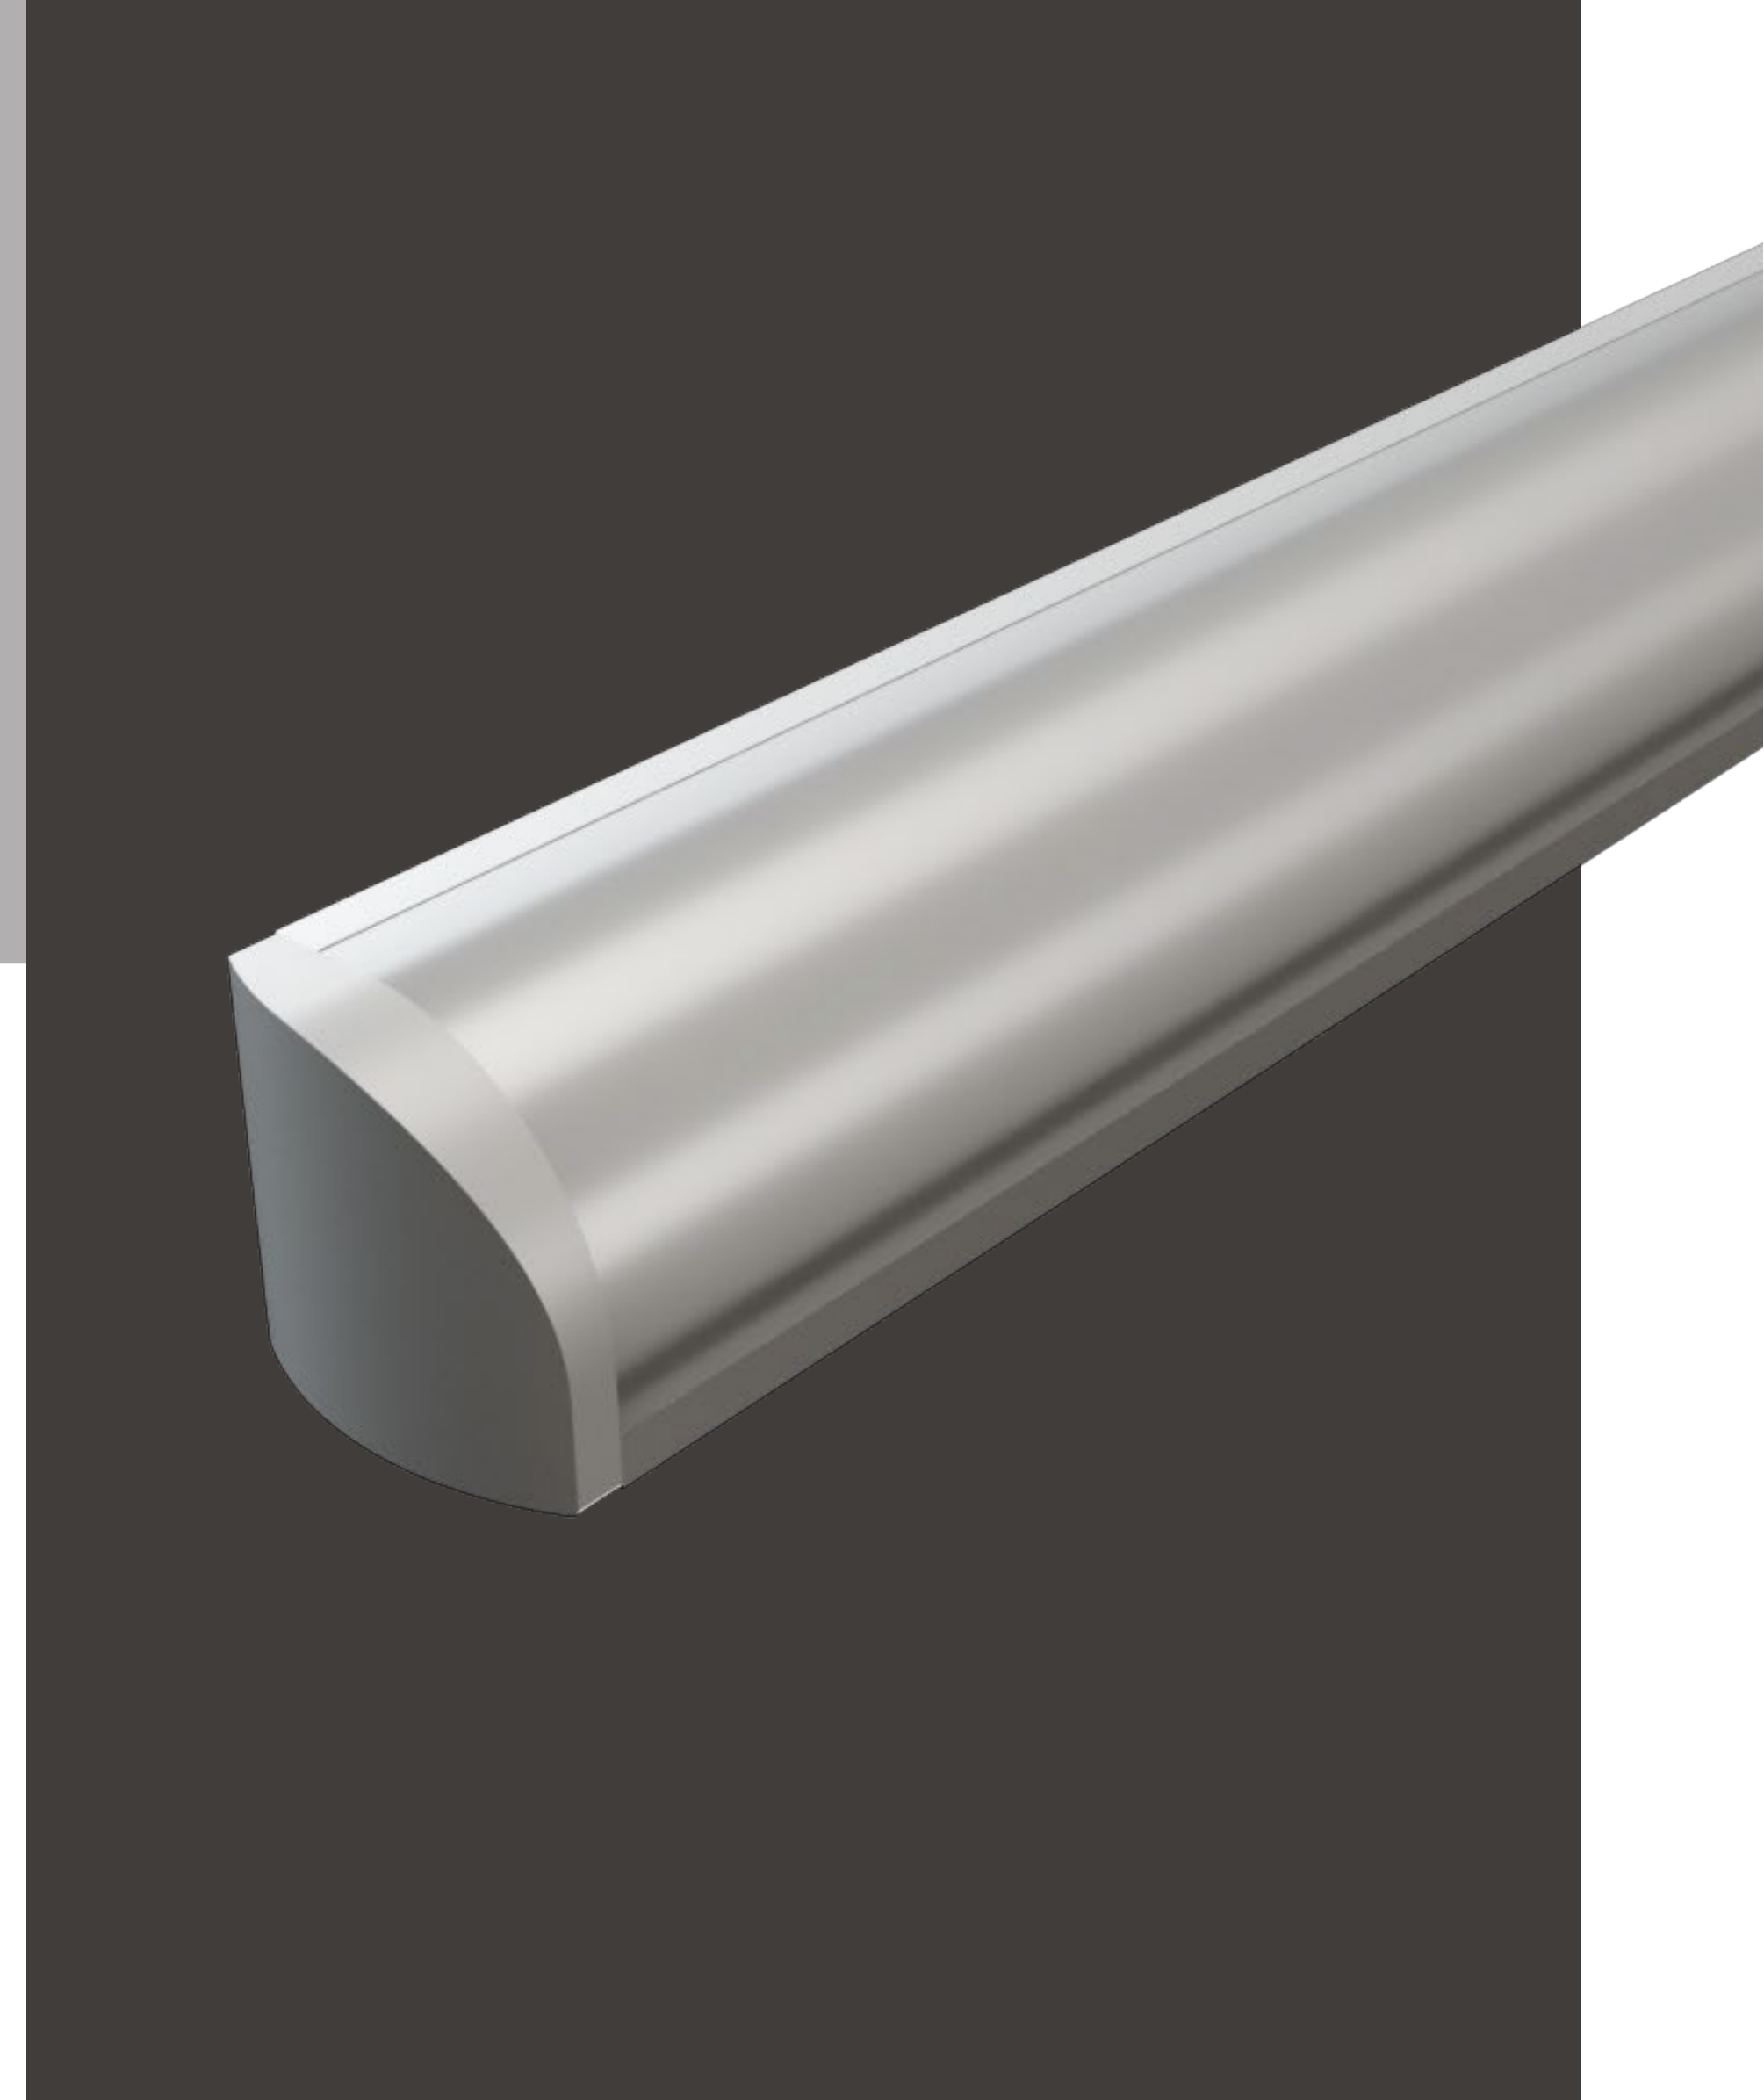



LUMEN
WARM

Rocco

Surface



IP20
RATED


IP44
RATED

IP67
RATED

Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

MADE IN

5
year
warranty

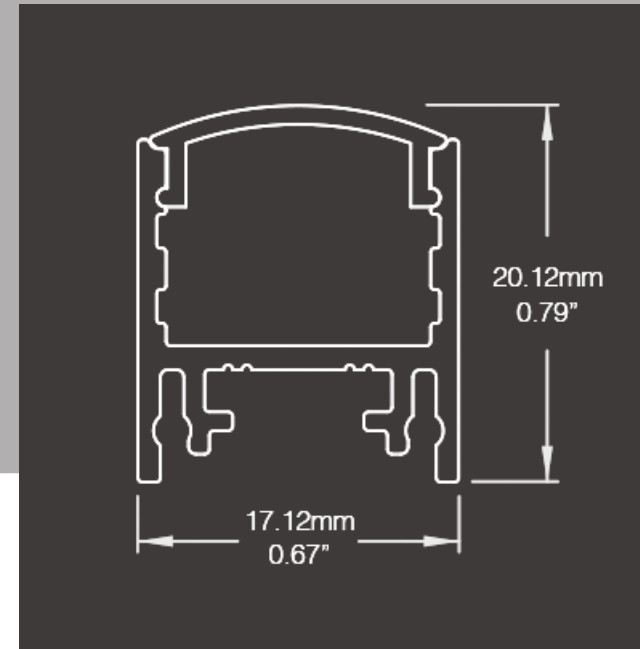

Dimensions

Invisible mounting | easy to install | optimal diffusion | custom patterns | field cuttable or ready to install

Lenses




clear frosted



white frosted



white opal



white opal 3D


Installation

Surface mounted with invisible bracket
or double sided tape

Application

Surface mounted lighting fixture,
general lighting, under cabinet, woodworks

3M
Tape



Clear Anodized



Matte White




Matte Black



Custom

LUMEN
WARM

Build your Rocco

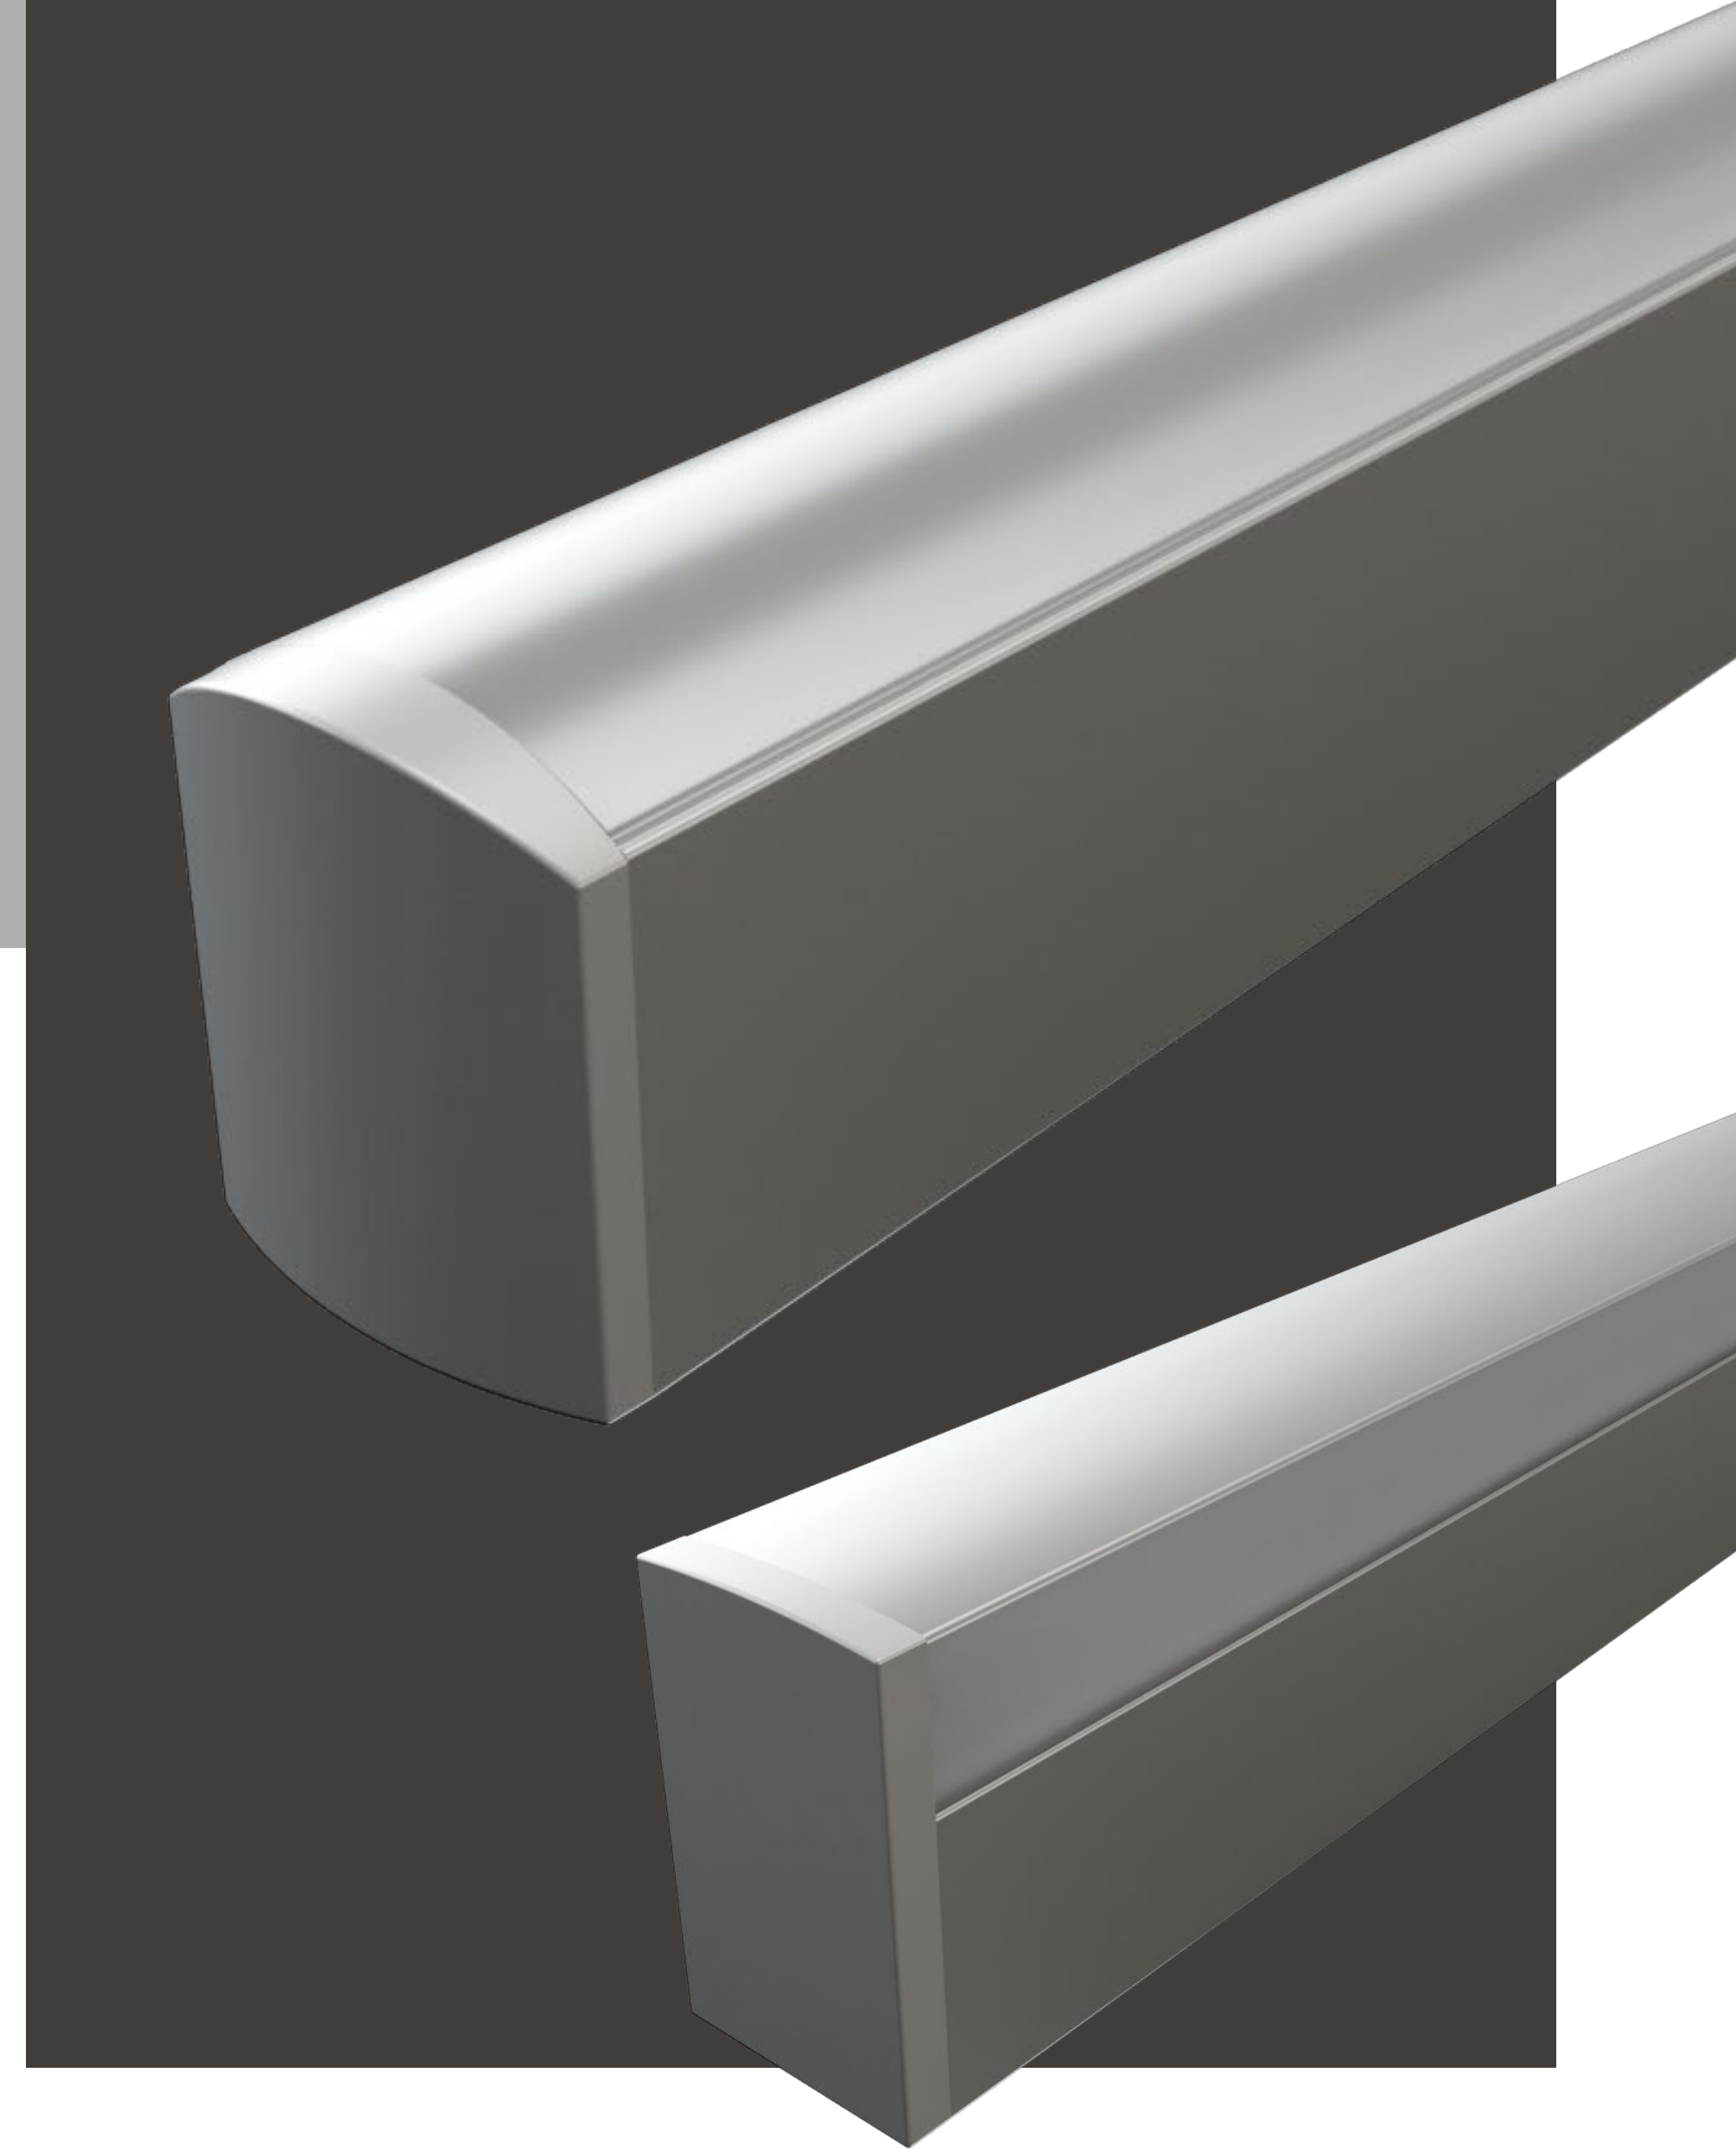



LUMEN
WARM

Rocco

suspended




IP20
RATED

IP44
RATED

IP67
RATED


Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

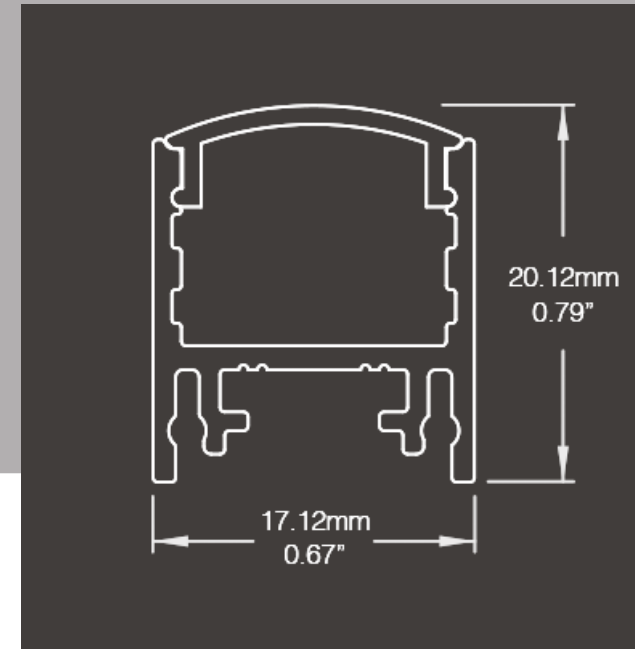

Dimensions

Sleek suspension | easy to install | custom patterns | optimal diffusion | field cuttable or ready to install

Lenses




clear frosted



white frosted



white opal



white opal 3D

Installation

Suspension cables

Application

Suspended lighting fixture, general lighting, architectural look, can be used to make custom luminaires



Clear Anodized



Matte White



Matte Black



Custom

LUMEN
WARM

Build your Rocco





LUMEN
WARM

Venga

Suspended



IP20
RATED


IP44
RATED

IP67
RATED

Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

MADE IN

5
year
warranty

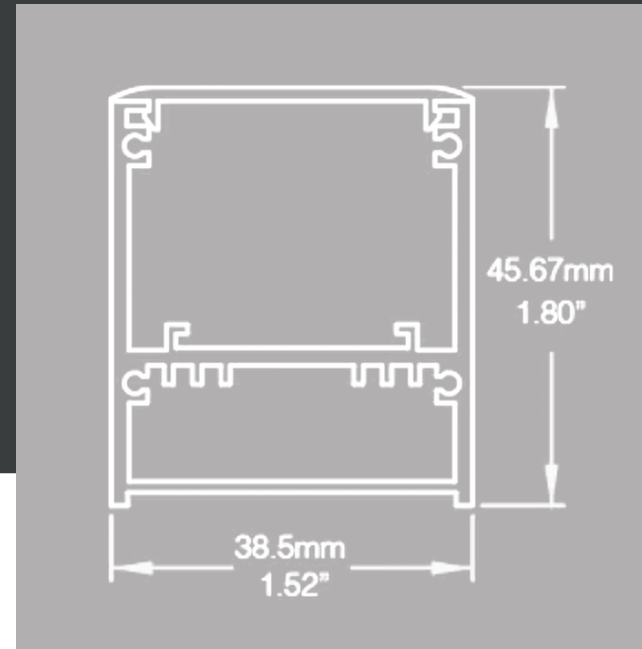

Dimensions

Optimal diffusion | custom patterns | field cuttable or ready to install

Lenses



white frosted clipped



white frosted inserted

Installation

Suspended with adjustable aircraft cables

Application

General lighting
Adaptable to most spaces
Linear patterns



Matte White



Matte Black



Custom

LUMEN
WARM

Build your Venga Suspended





LUMEN
WARM

Venga

Surface




IP20
RATED

IP44
RATED

IP67
RATED

Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

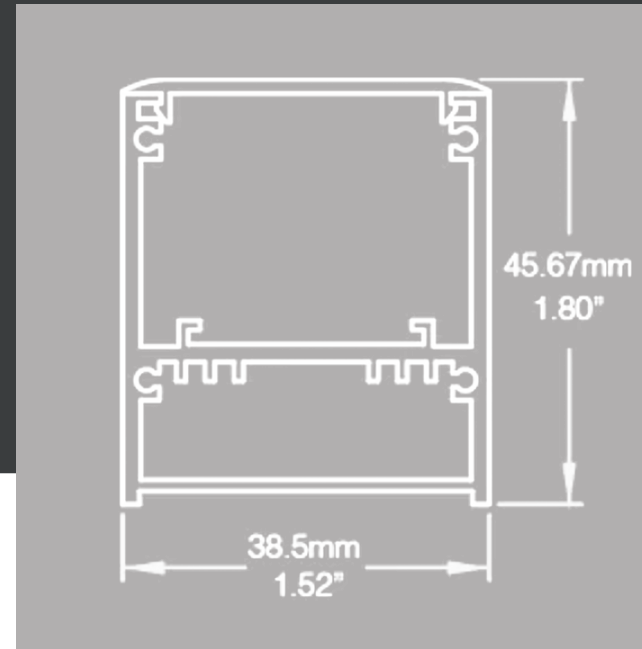

Dimensions

Optimal diffusion | custom patterns | field cuttable or ready to install

Lenses



white frosted clipped



white frosted inserted

Installation

Surface mounted

Application

General lighting
Adaptable to most spaces
Linear patterns



Matte White




Matte Black



Custom

LUMEN
WARM

Build your Venga Surface Mounted

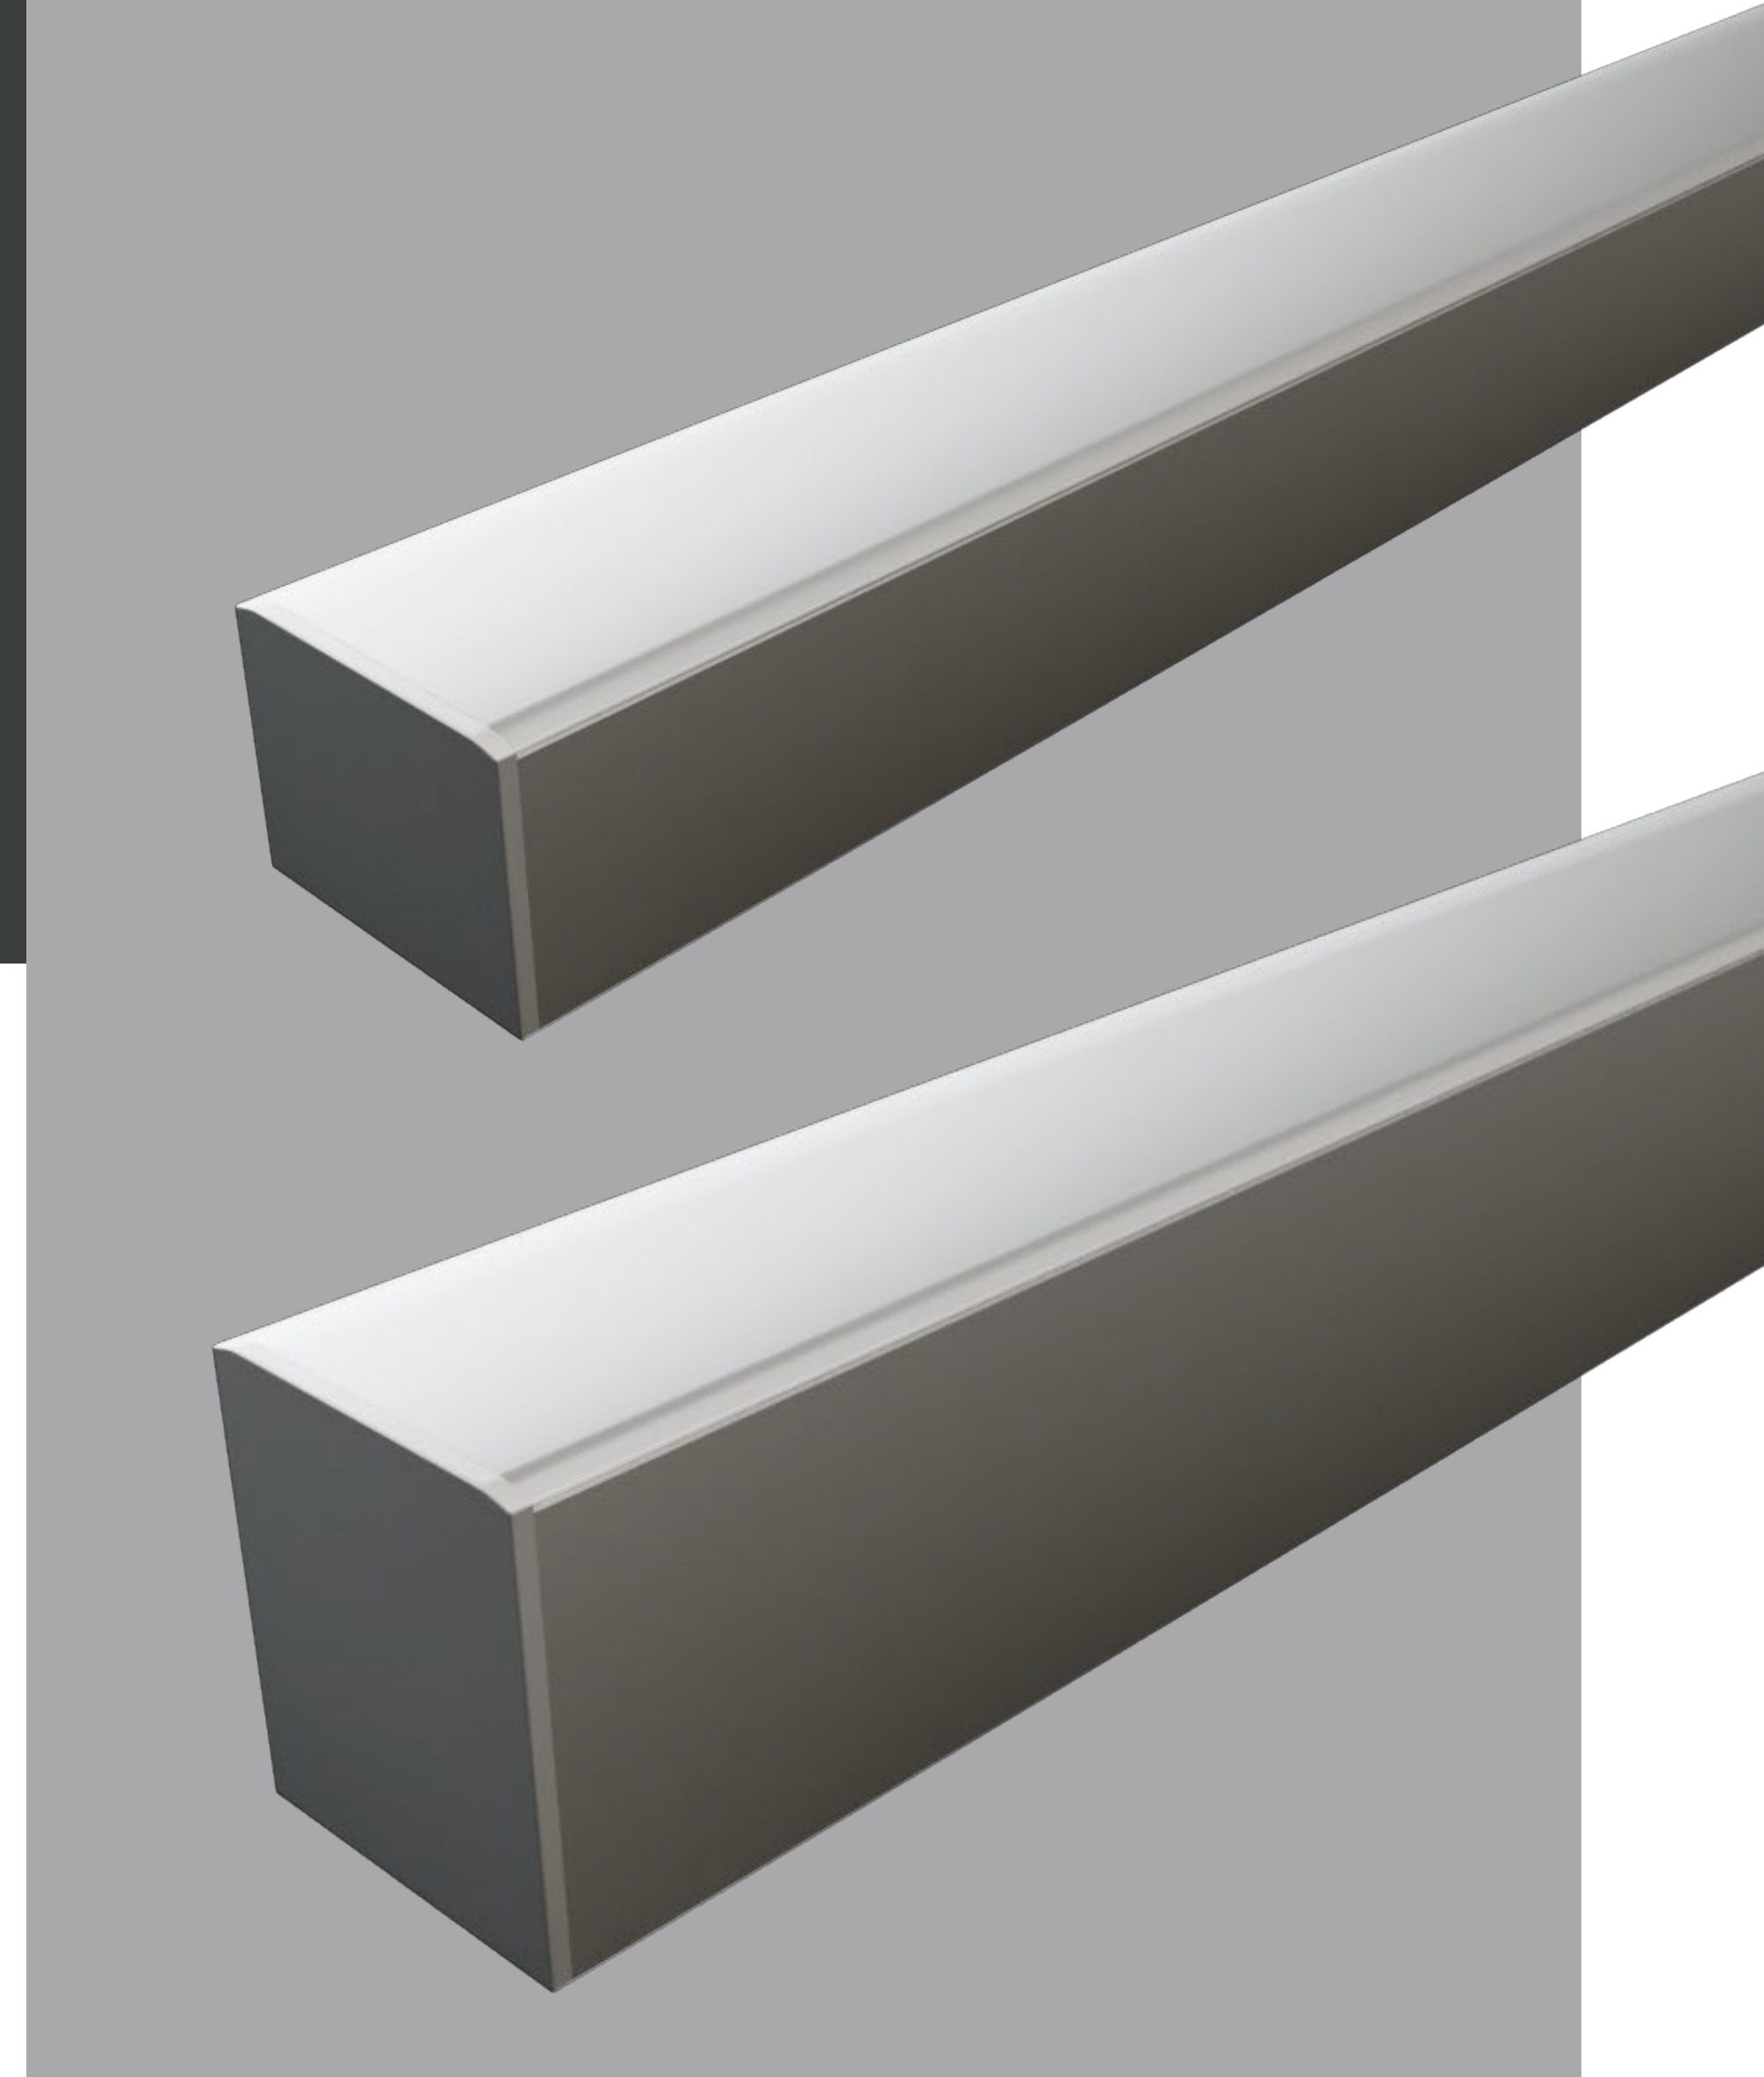



LUMEN
WARM

Venga

Wall Mounted

**IP20**
RATED


IP44
RATED

IP67
RATED

Can be used to comply with 2019 Title 24 Part 6 High efficacy LED light source requirements

MADE IN

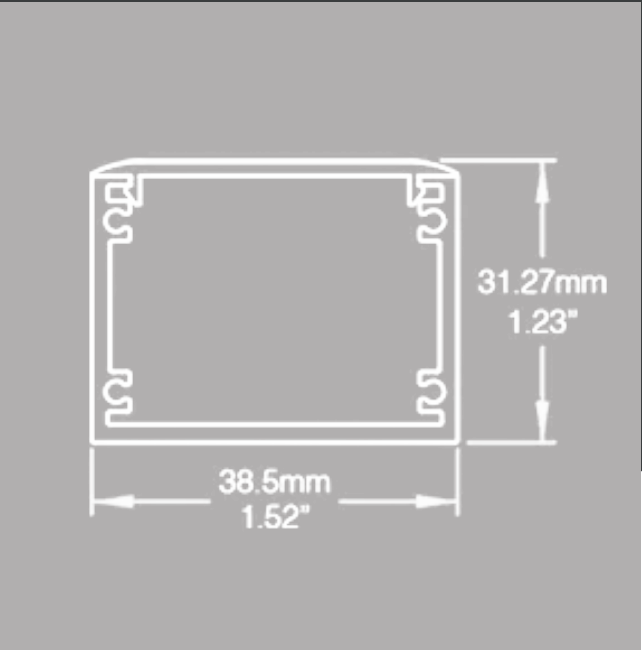


Dimensions

Optimal diffusion | field cuttable or ready to install | custom sizes

Lenses


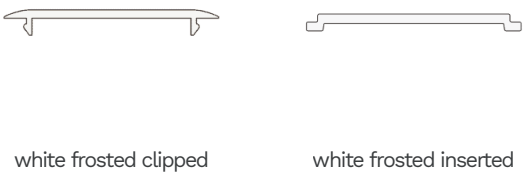


Installation

Wall mounted

Application

General lighting
Adaptable to most spaces
Wall sconce



LUMEN
WARM

Build your Venga Wall Mounted



LUMEN
WARM

Venga U&D

Suspended



IP20
RATED


IP44
RATED

IP67
RATED

Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

MADE IN


5
year
warranty

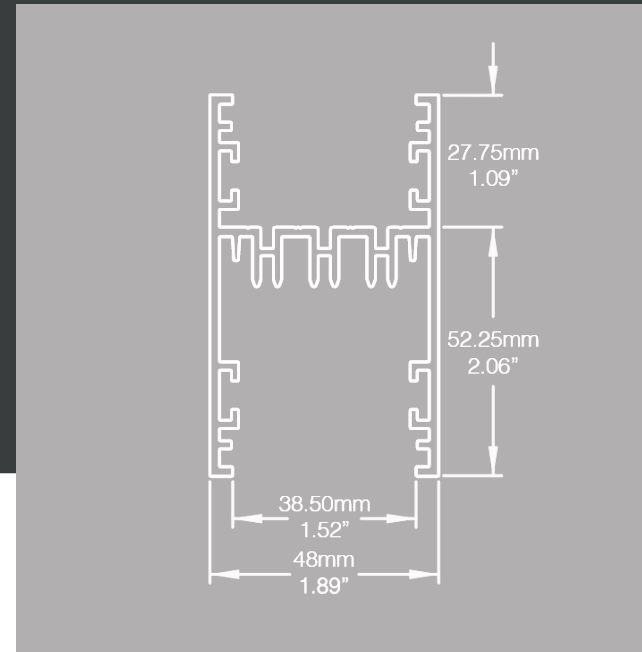


Dimensions

Optimal diffusion | custom patterns | field cuttable or ready to install


Lenses




frosted



90°



60°



asymmetric



batwing

Installation

Suspended with adjustable aircraft cables

Application

Direct and indirect
Flexible lighting system
Linear patterns



Matte White



Matte Black



Custom

LUMEN
WARM

Build your Venga Up & Down





301 302

LUMEN
WARM

Venga U&D

Wall Mounted




IP20
RATED

IP44
RATED

IP67
RATED


Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

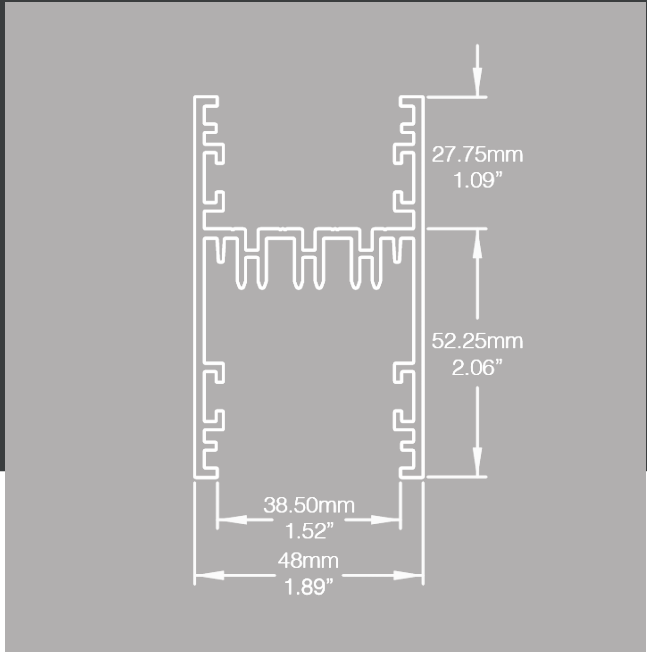


Dimensions

Optimal diffusion | field cuttable or ready to install | custom sizes


Lenses




frosted



90°



60°



asymmetric




batwing

Installation

Wall mounted

Application

General lighting
Adaptable to most spaces
Wall sconce




Matte White



Matte Black



Custom

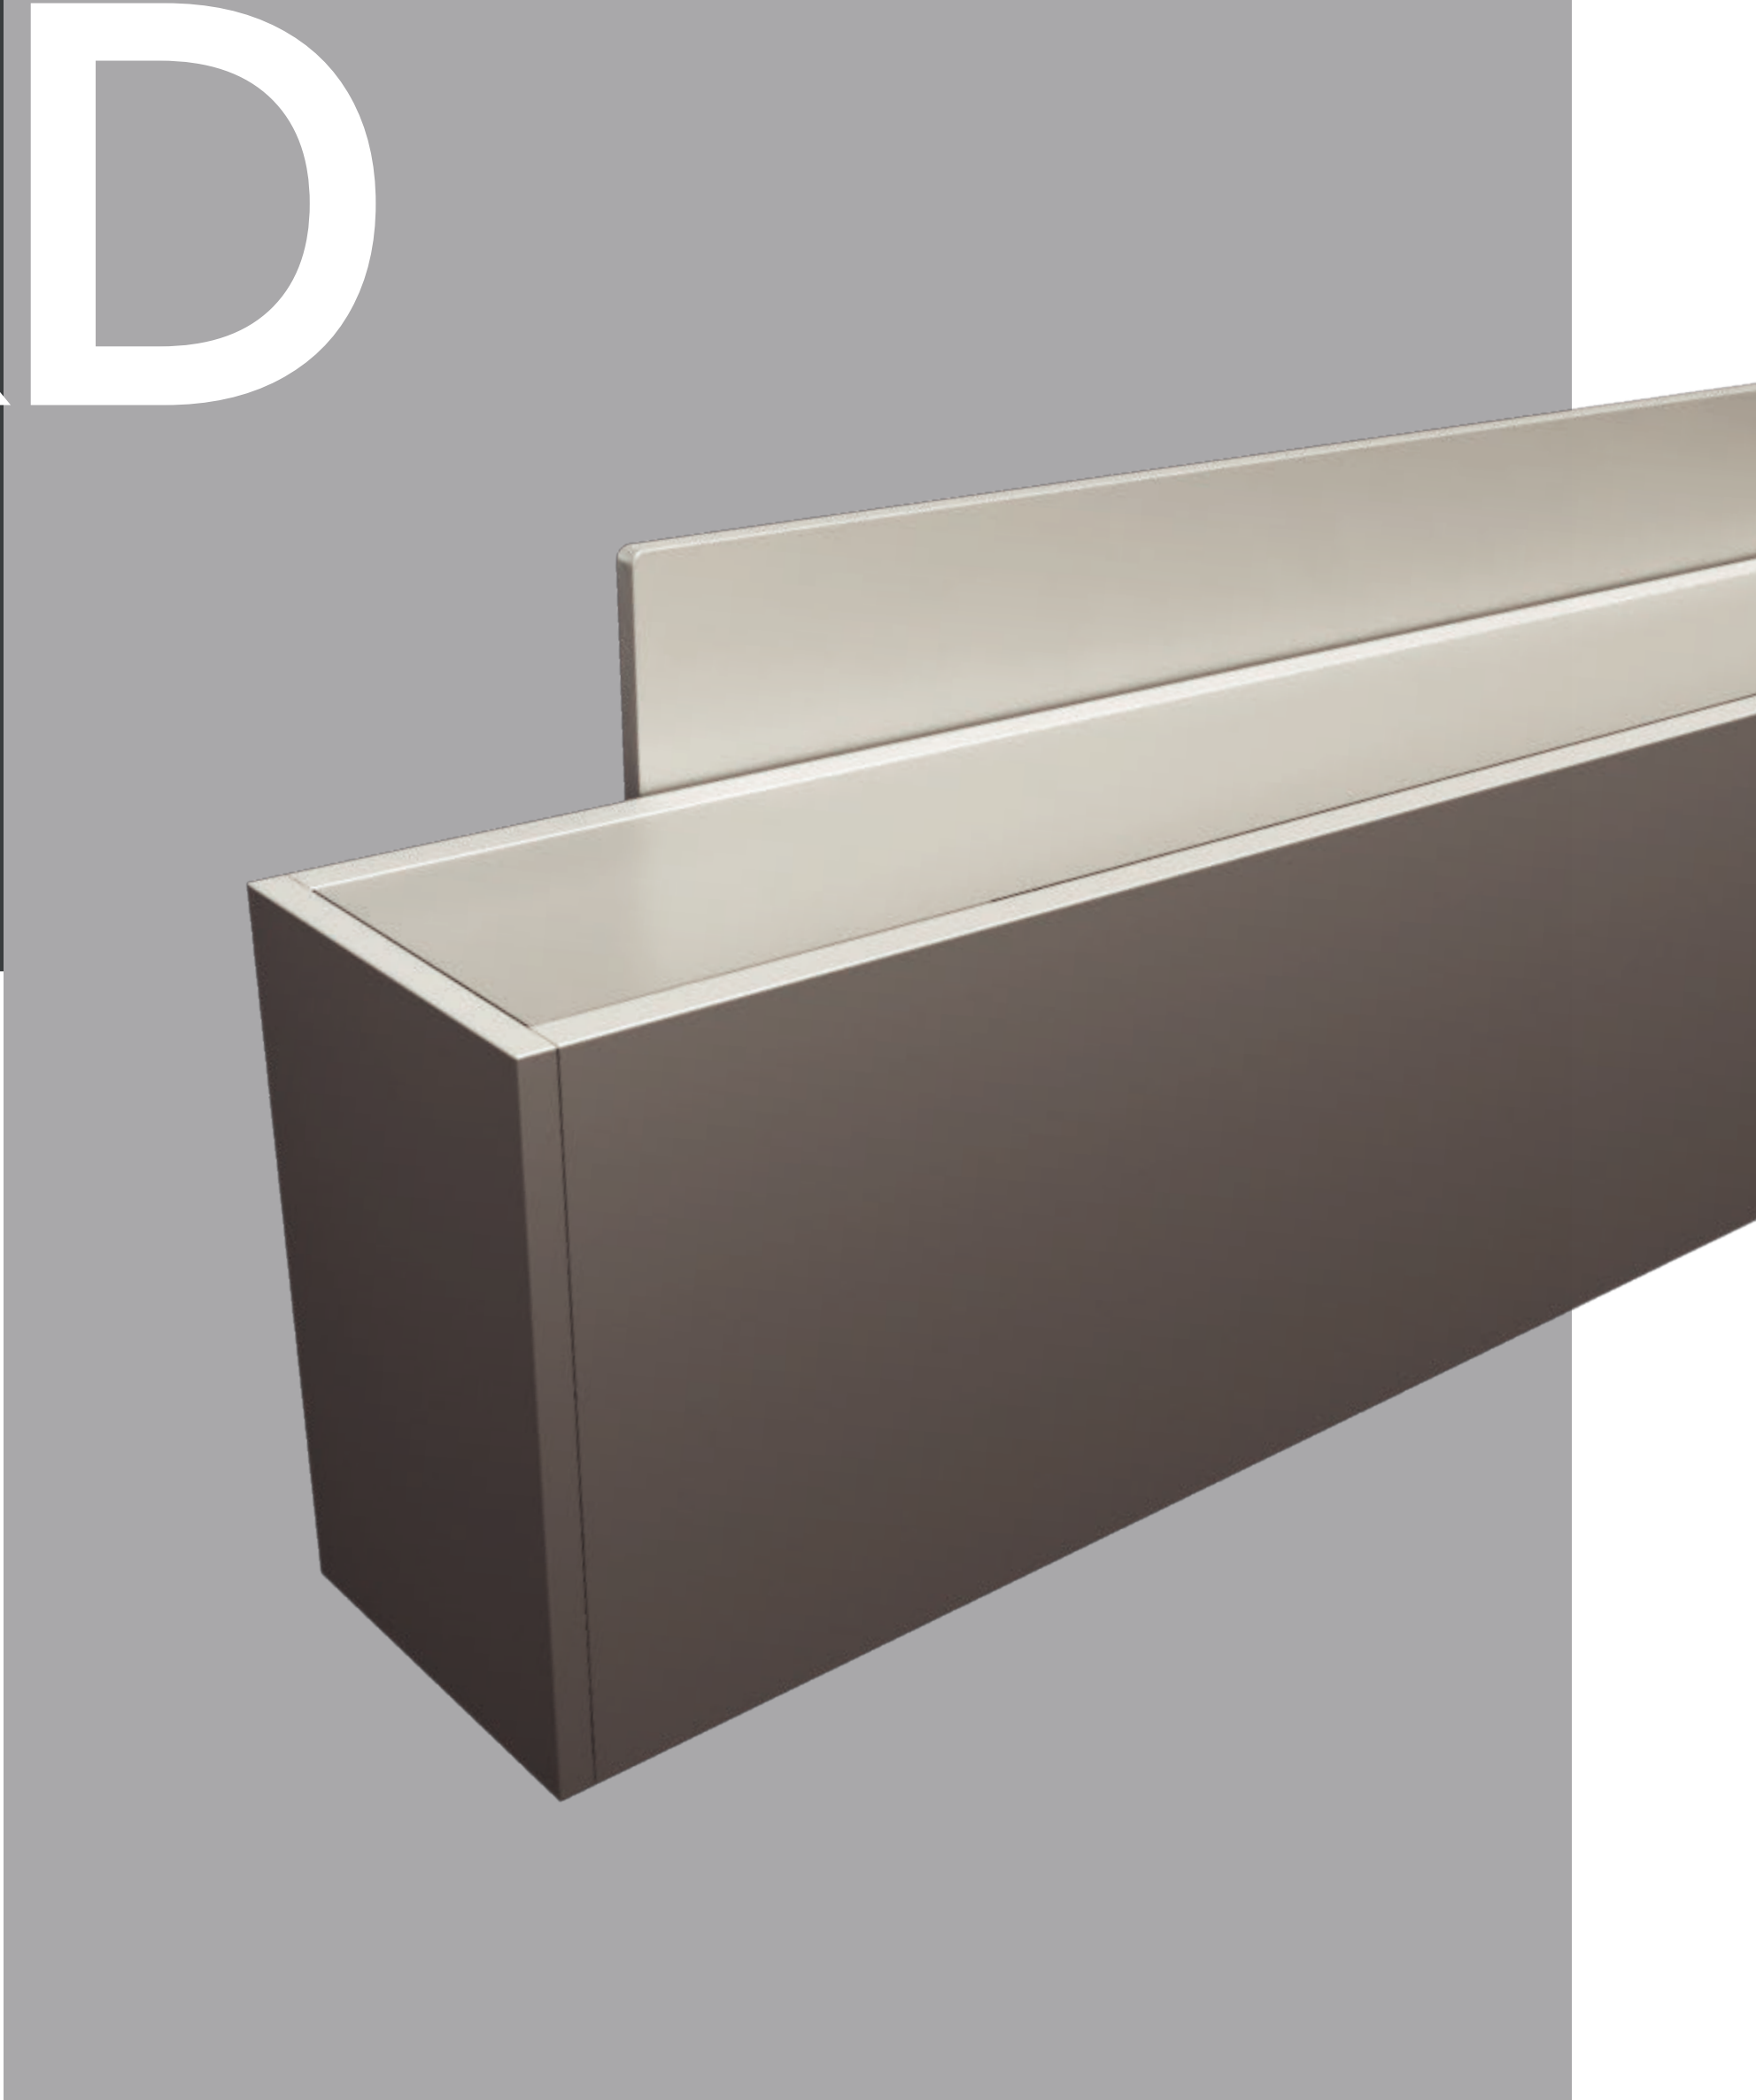

LUMEN
WARM

Build your Venga Up & Down

12

LUMEN
WARM



Palazzo

Master




IP20
RATED

IP44
RATED

IP67
RATED


Can be used
to comply with
24
Part 6
High efficacy LED light
source requirements

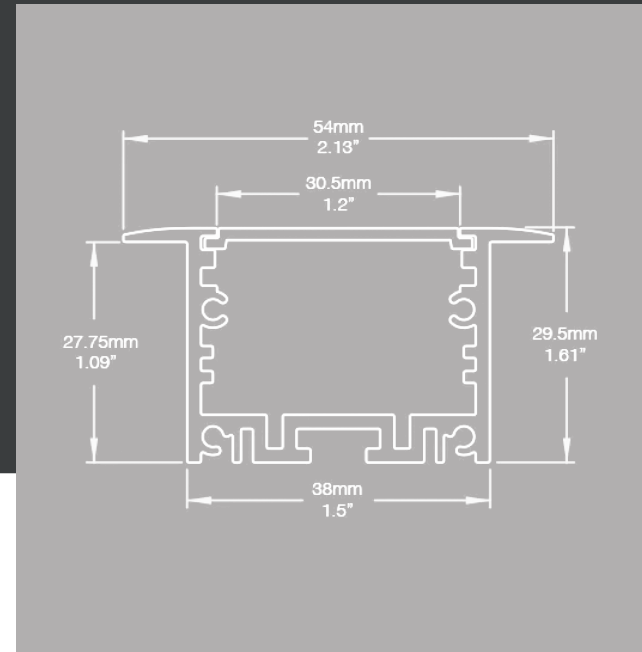

Dimensions

Easy to install | optimal diffusion | custom patterns | field cuttable or ready to install

Lenses




white frosted inserted



full length grill baffle



custom grill baffle
application



grill baffle and
inserted lens

Installation

Recessed with spring brackets

Application

Architectural recessed linear
Flexible lighting system
Linear patterns



Clear Anodized




Matte White



Matte Black



Custom

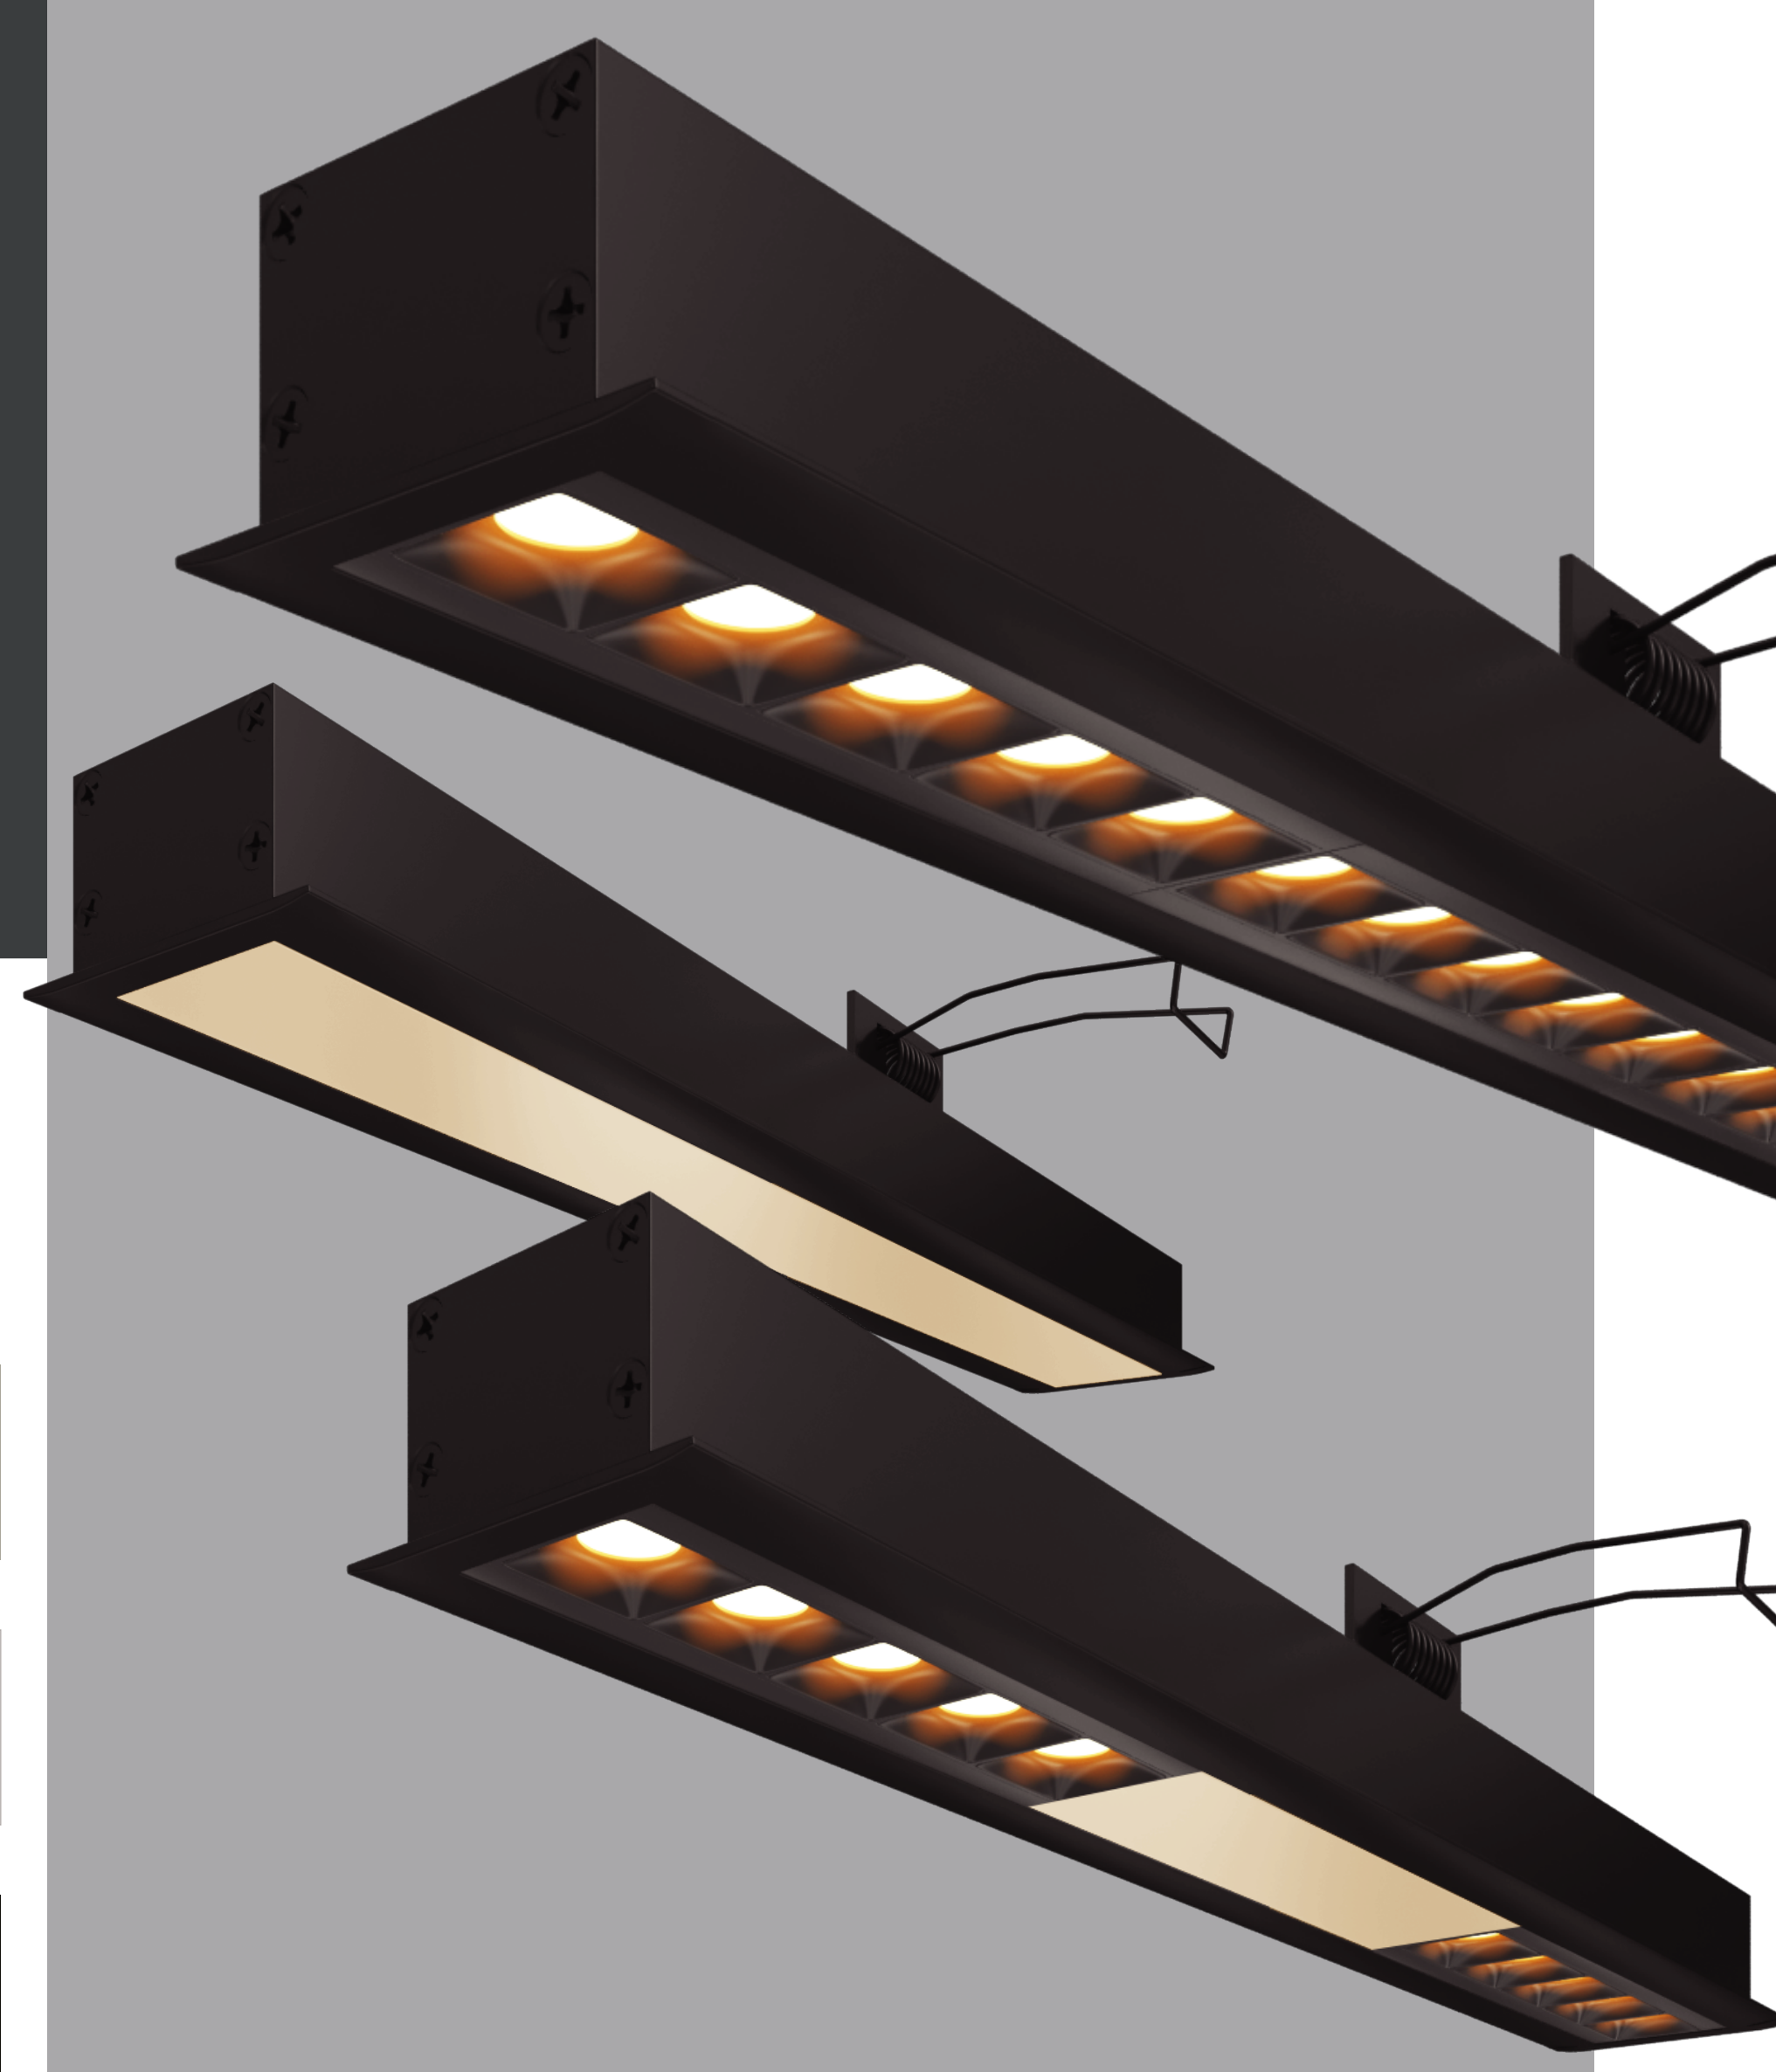

LUMEN
WARM

Build your Palazzo Master



LUMEN
WARM

Myla



IP20
RATED


IP44
RATED

IP67
RATED

Can be used
to comply with
2019 Title
24
Part 6
High efficacy LED light
source requirements

MADE IN


5
year
warranty

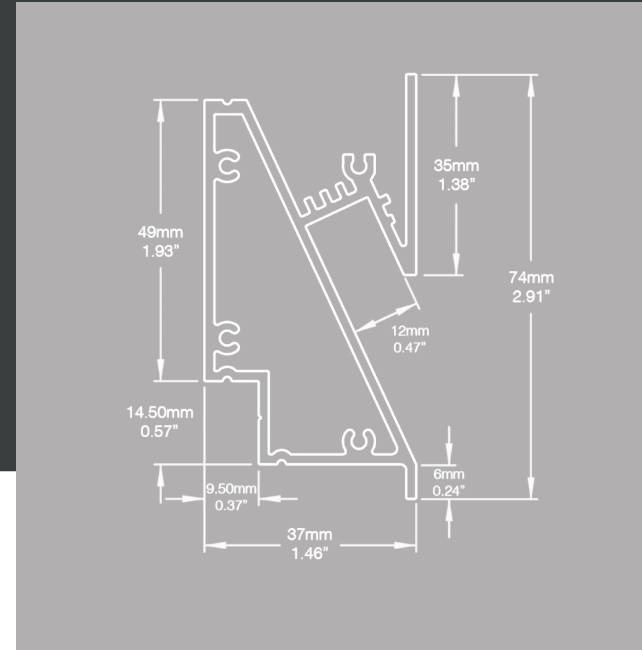

Dimensions

Great accent lighting | long-run step lighting | field cuttable or ready to install

Installation

Recessed in dry wall or hard surfaces

Application

Common spaces
Step lighting
Outdoor lighting



Clear Anodized



Matte White




Matte Black



Custom

LUMEN
WARM

Build your Myla

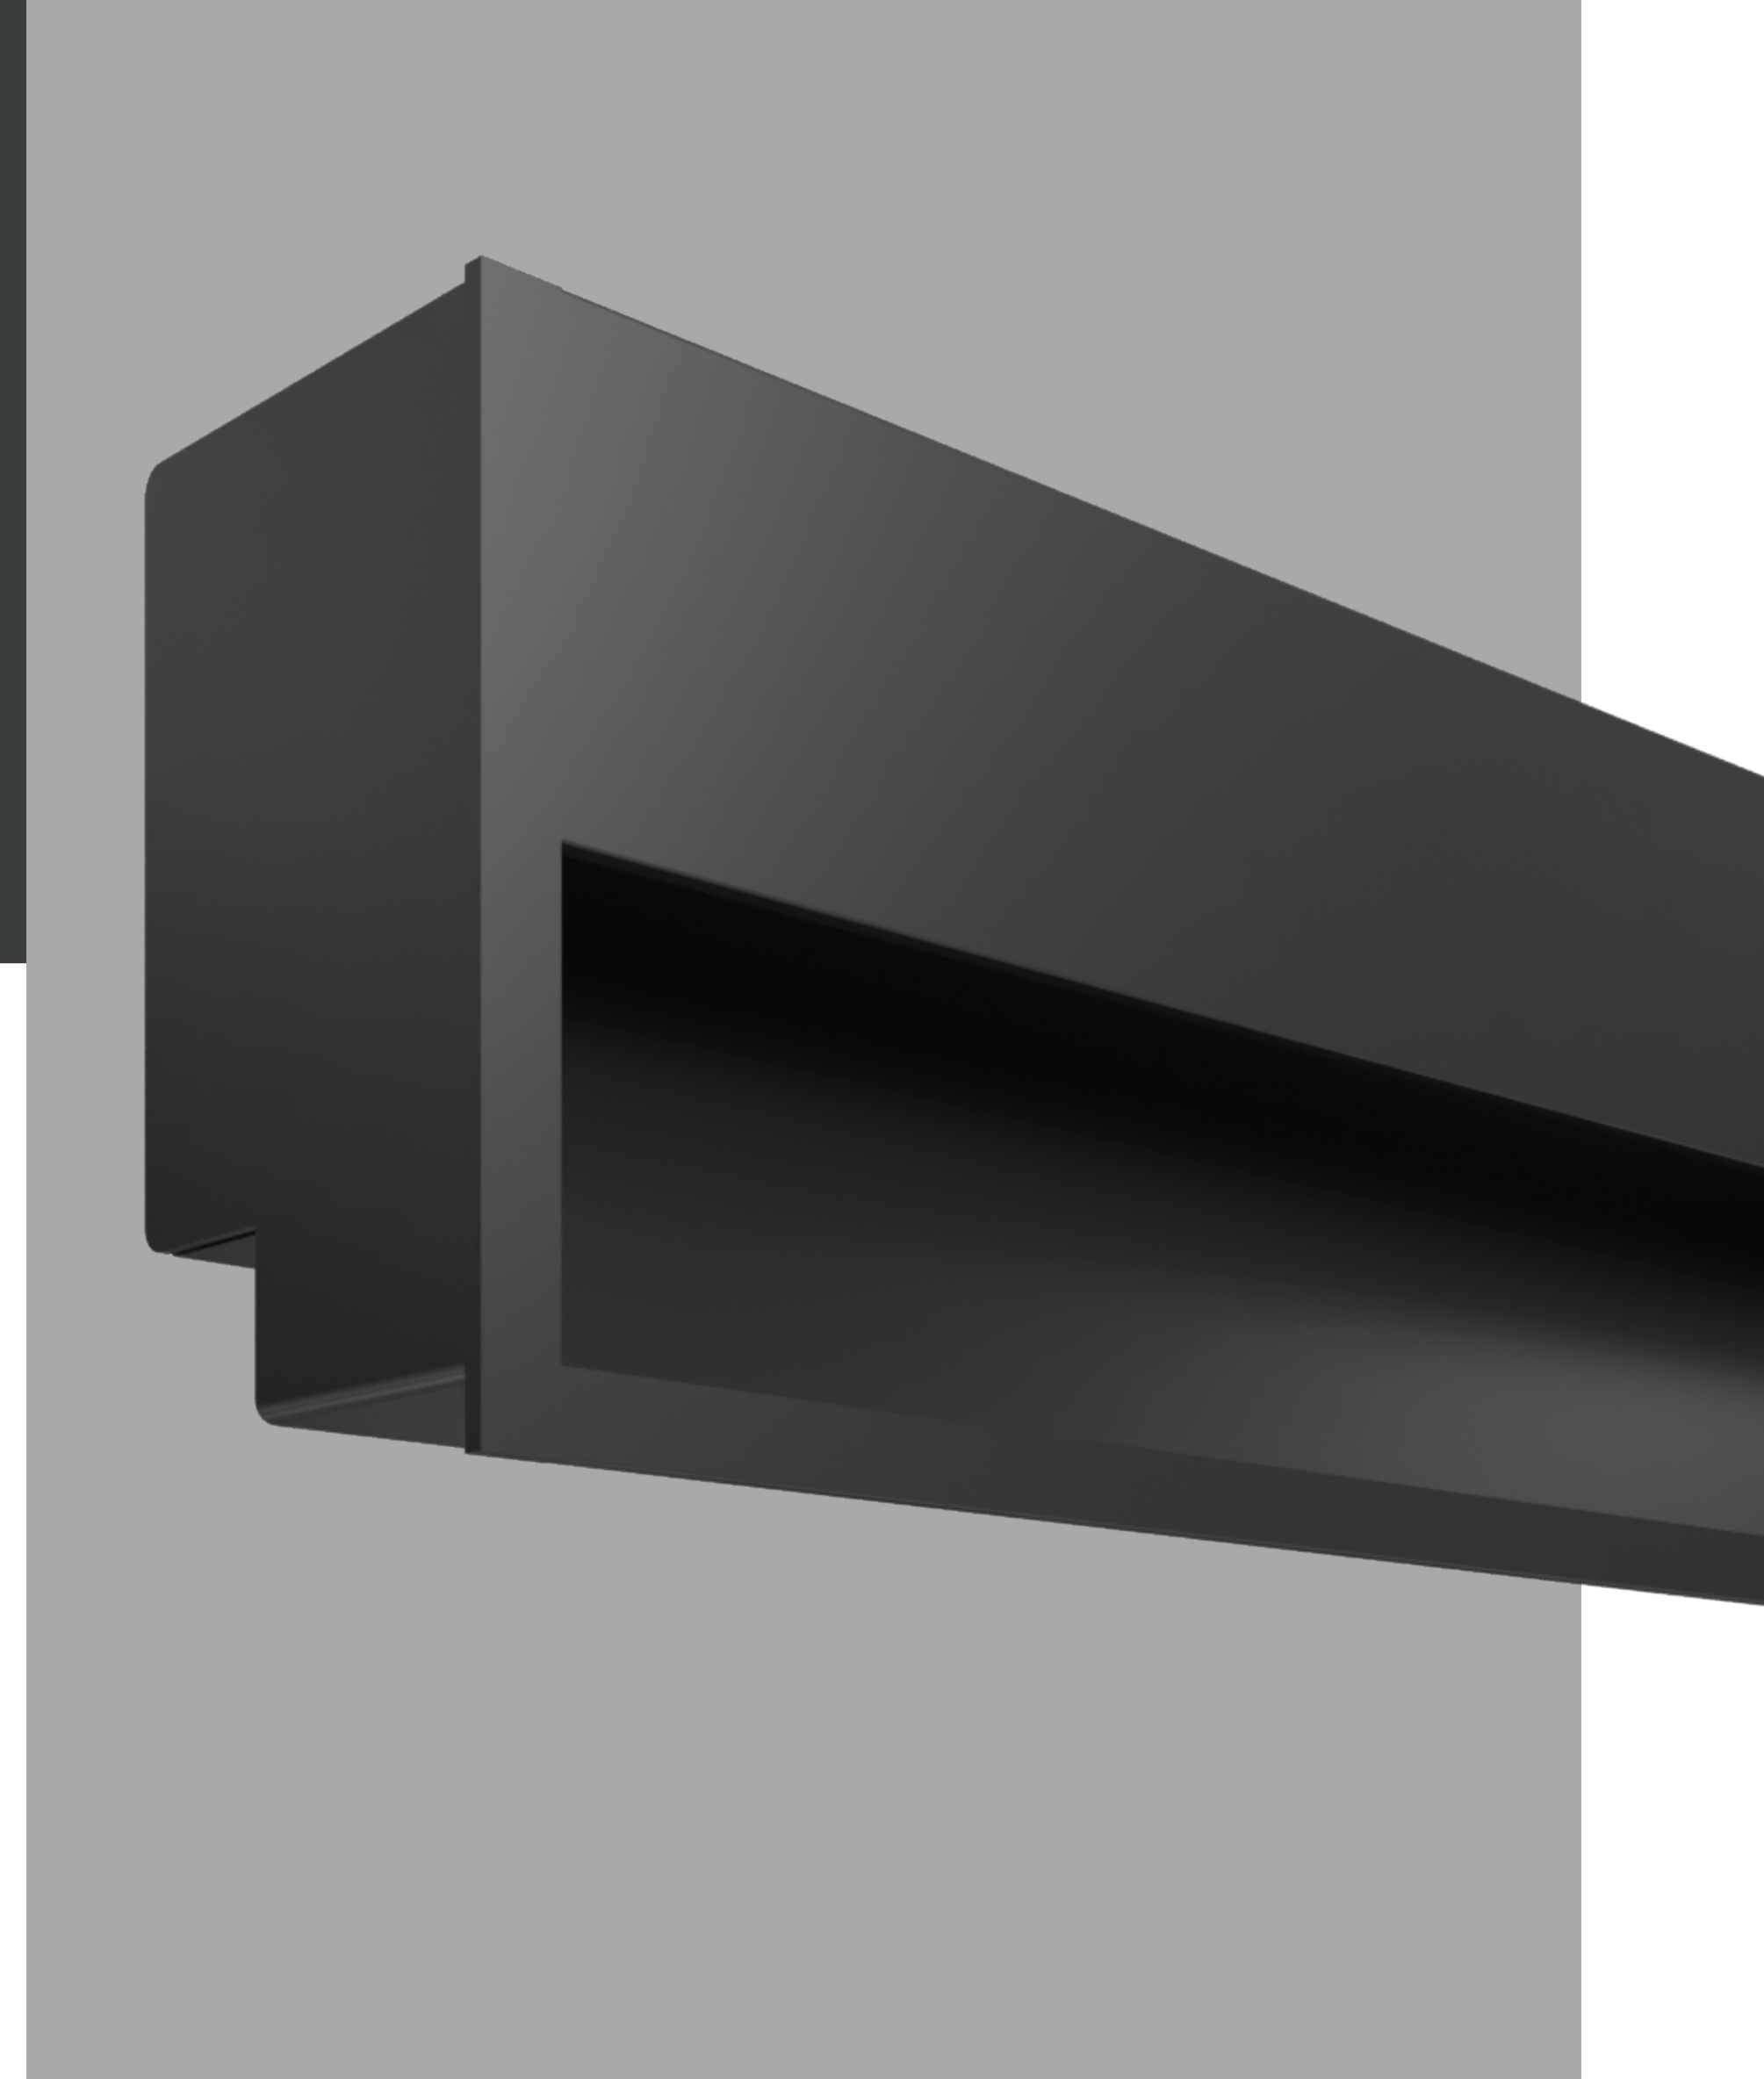

Accessories

and cables



Twin Cable:
Regular construction cable with no particular rating


FT4/CMR Cable:
Fire retardant cable, riser type

DC Quick Connect Static White/Dim to Warm:
Quick connector FT6/CMP rated for plenums
(available in 1 to 3, female-male, extensions, etc)

DC Quick Connect Tunable White:
3 pin Quick connector, IP67 rated, FT6/CMP rated for plenums
(available in 1 to 3, female-male, extensions, etc)

LUMEN
WARM


[View all our solutions](#)

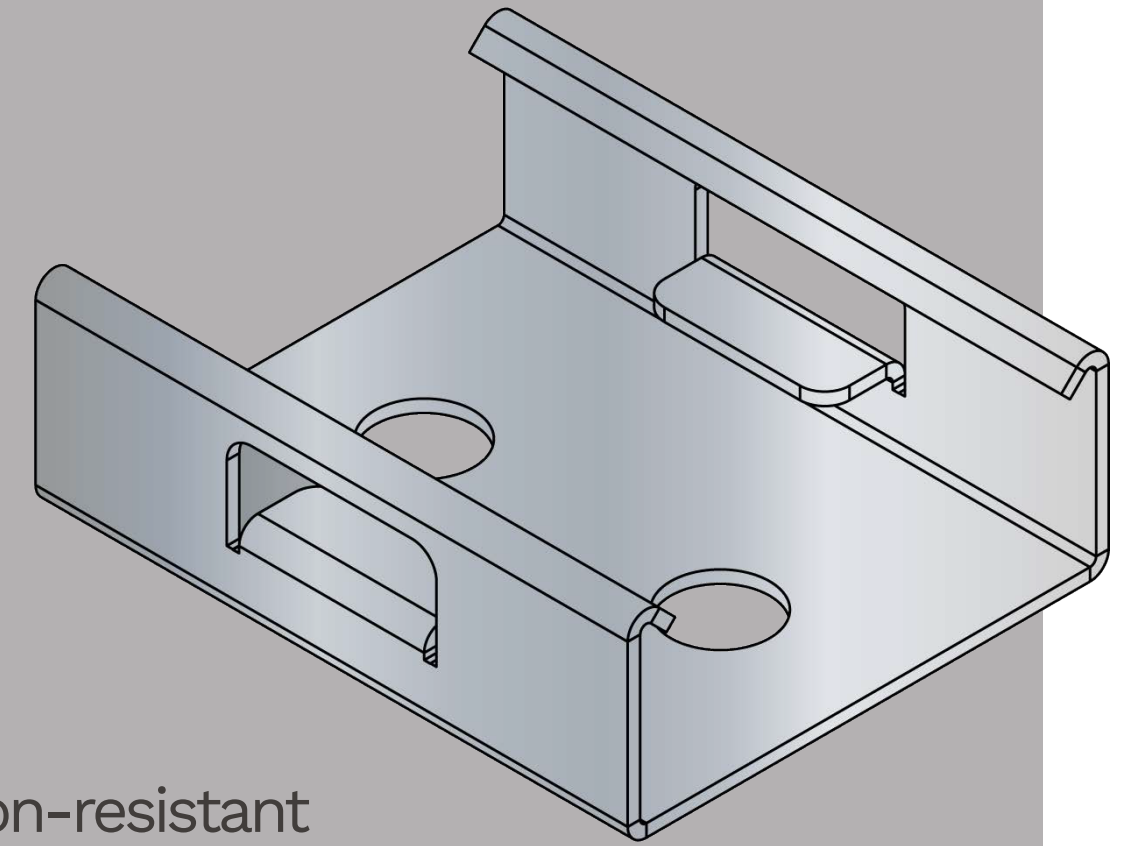

Highest grade corrosion-resistant stainless bracket used with most of our extrusions



Invisible yet easy to install clip for Connor profile

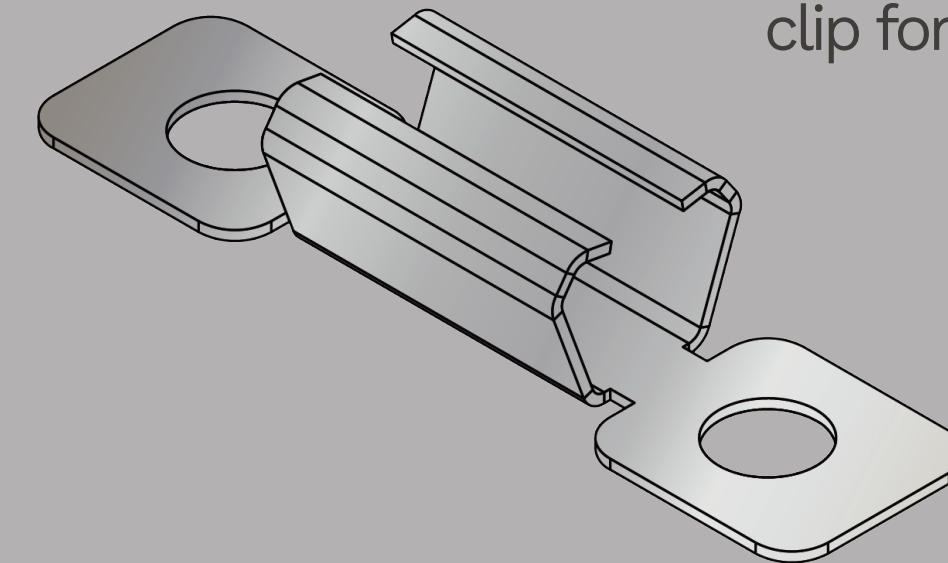

Invisible and ultra durable stainless for Rocco profile

Drivers

many configuration available



Non-Dimmable Drivers
(30W, 60W, 96W, 288W)



Five-in-One
Dimmable Drivers

Forward phase, Reverse phase
ELV, 0-10V, 1-10V
(30W, 60W, 96W, 192W, 288W)



Lutron Drivers
Hi-Lume 1% (5-40W),
Hi-Lume premier 0.1% (96W)



DMX Drivers
cRUus (96W)




Zigbee Drivers
cRUus (96w)

Controls

enabling the LUWA ecosystem



luwa
Intelligent adjustable LED Driver

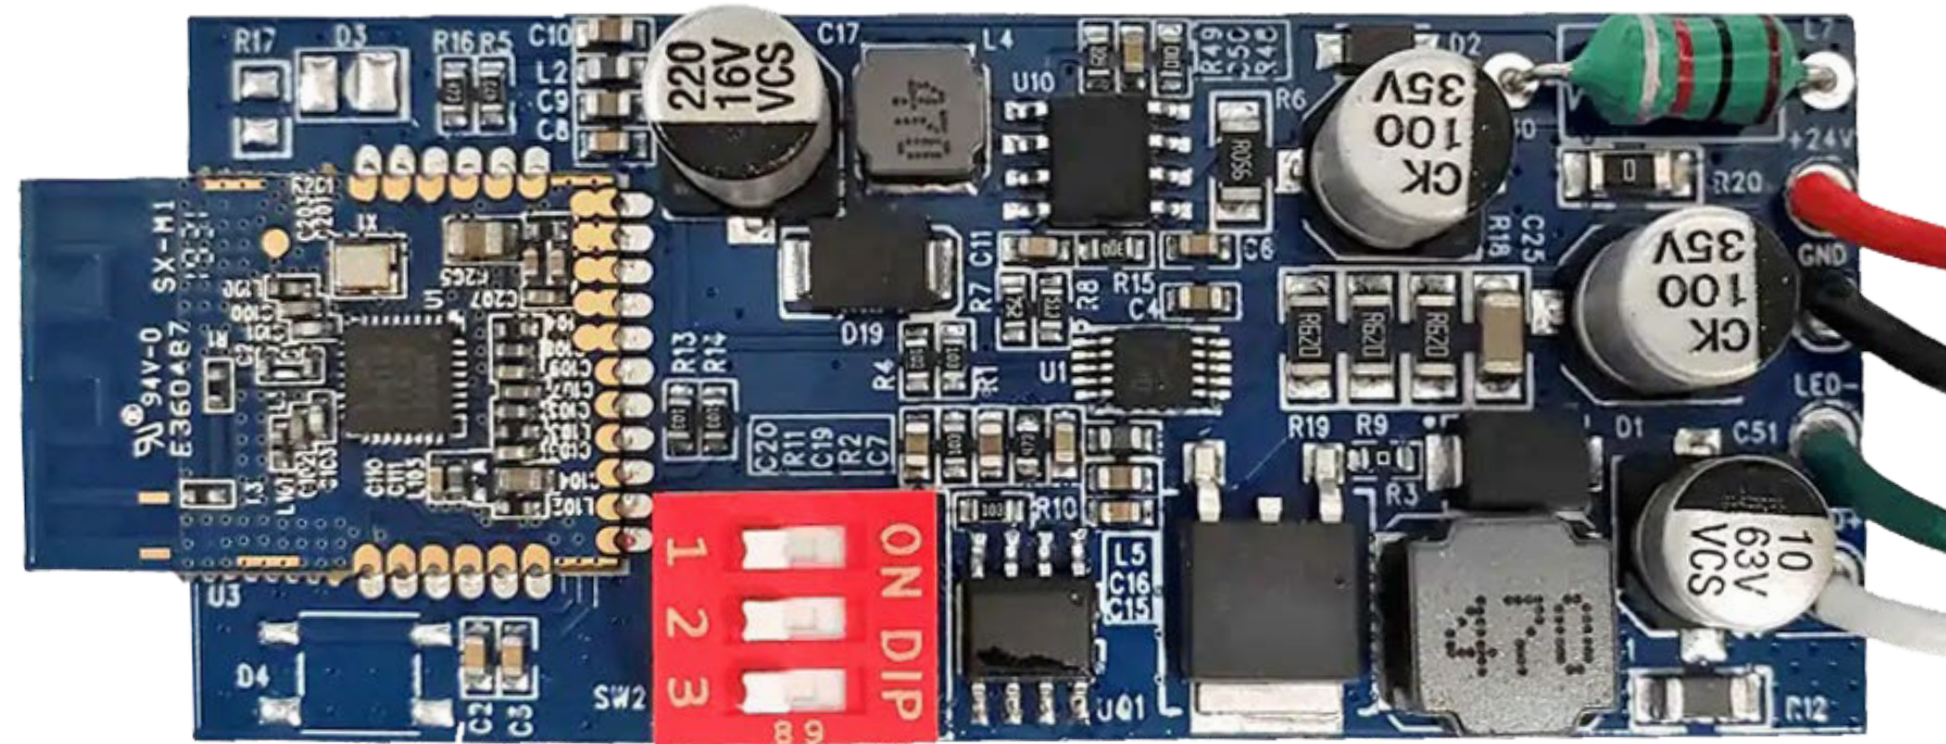

- ≡ LUWA is the first intelligent constant current source of its kind
- ≡ Propelled by Zigbee 3.0 technology
- ≡ Compatible with Philips Hue, Google Home, Amazon Alexa, Logitech Harmony and many others
- ≡ Enables control of your fixtures individually or in groups

LUMEN
WARM

[LUWA specification sheet](#)

[Sensor specification sheet](#)




Contact or motion sensor switch for automatic control of lights for doors, closets, drawers, undercabinet, etc.




Smart multi-function controllers with wireless option

LED extrusions


comparison chart

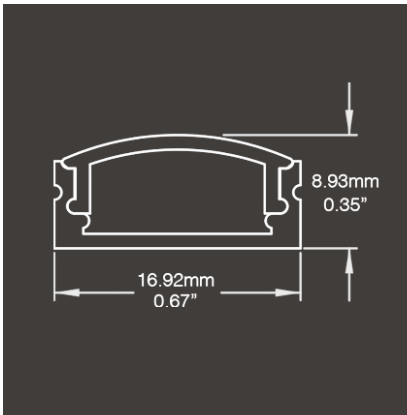


Olivia

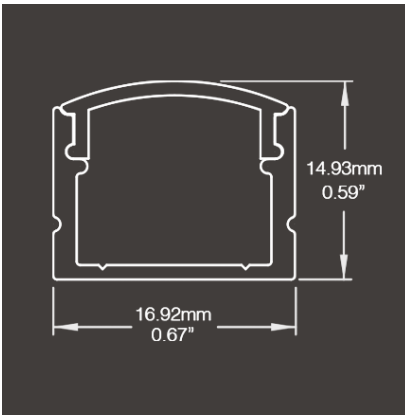


Doby

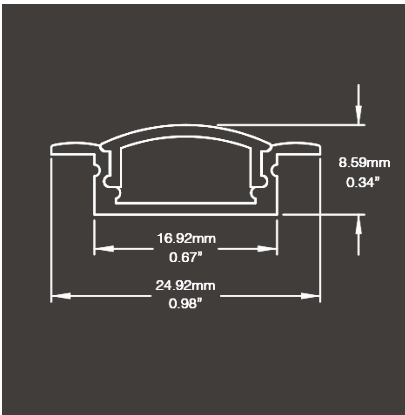

Robertha

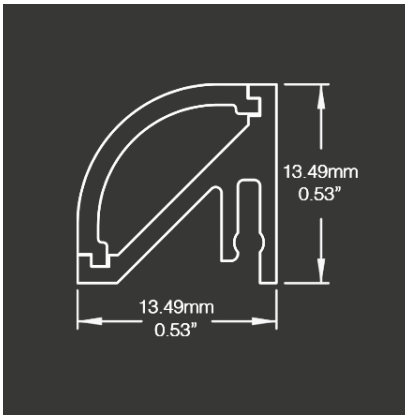

Connor

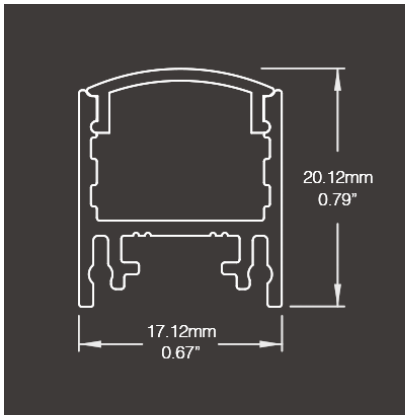

Rocco

Installation

- Surface
- Suspended
- Recessed
- Wall Mounted



Finishes

- Clear (anodized)
- White (painted)
- Black (painted)



IP67



Dot free option



*



*



*



Highest source output

1150lm/ft - 3770lm/M

1150lm/ft - 3770lm/M

1150lm/ft - 3770lm/M







1150lm/ft - 3770lm/M

1150lm/ft - 3770lm/M

* With high density led tapes

LED extrusions

comparison chart

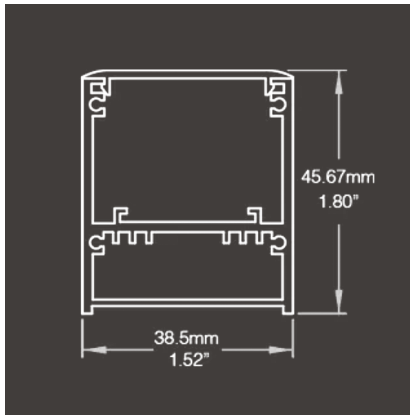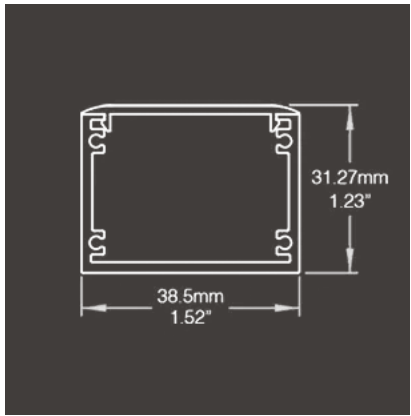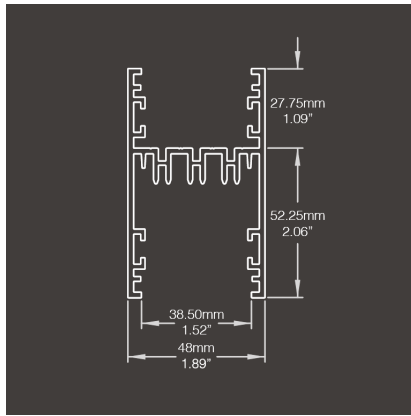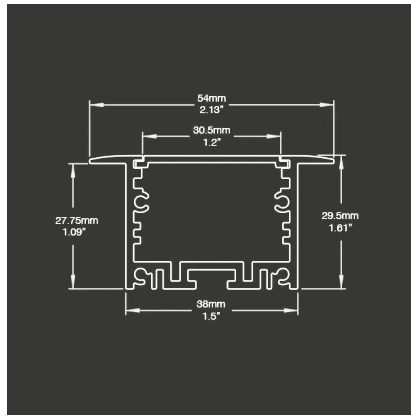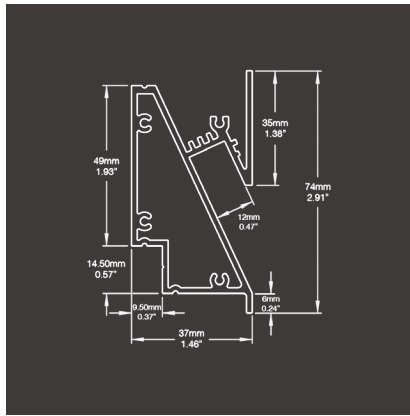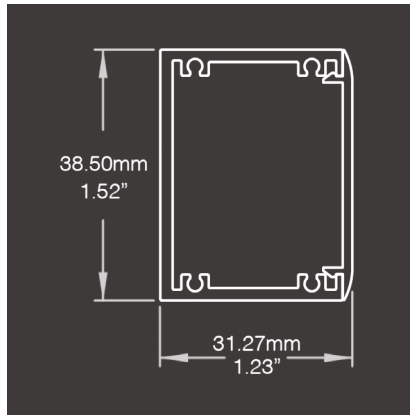						
Installation	Venga	Venga Slim	Venga Up & Down	Palazo Master	Myla	Cercio
Surface	■	■				
Suspended	■		■			■
Recessed				■	■	
Wall Mounted	■	■	■			■
Finishes						
Clear (anodized)		■		■	■	
White (painted)	■	■	■	■	■	■
Black (painted)	■	■	■	■	■	■
IP67	■	■	■	■	■	
Dot free option	■	■	■	■		■
Highest source output	1150lm/ft - 3770lm/M	1400lm/ft - 4600lm/M	1150lm/ft - 3770lm/M	1400lm/ft - 4600lm/M	1150lm/ft - 3770lm/M	1400lm/ft - 4600lm/M

LUMEN WARM

Compatible with Luwa ecosystem

luwa

Intelligent adjustable LED Driver

Made in North America



Configure

your ideal lighting solution now!

Learn more

about all our solutions

Contact

your local sales representative

Discover

the Luwa ecosystem

LUMEN WARM 155 Fortin Street Suite 180, Quebec, QC G1M 3M2
+1 866 586.3692 info@lumenwarm.com lumenwarm.com