
PROJECT NAME TYPE QTY



ALINA G5 ADJUSTABLE

Our Alina family offers you an architectural solution that is customizable to your needs and can be adapted to fit almost any space, including a winding hallway full of twists and turns. An ever-growing number of fixtures are compatible with the Alina and can be changed as trends and your needs evolve in time. These fixtures can be controlled individually – or as a whole group – with most of the smart home controllers on the market.



| Colour Temperature | 2700K, 3000K, 3500K, 4000K |
|--------------------|----------------------------|
| CRI* | 90 |
| Lumen Output | 764lm |
| Lumen/Watt | 85lm/W |

^{*}Please note this information is based off a 4000K LED Source.


| Input Voltage | Alina Master, 24VDC |
|------------------|-------------------------------------|
| Constant Voltage | 24V |
| Consumption | 9W |
| Dimming Options | Alina Master, LUWA Smart LED Driver |
| Material | Aluminum body, Polycarbonate baffle |

^{*}Please note this information is based off a 4000K LED Source.

BAFFLE FINISH



COLOUR TEMPERATURE





Custom



SPECIFICATION SHEET PRODUCT NUMBER: LWAL-G5-TT

PROJECT NAME TYPE QTY

ORDERING OPTIONS

Alina G5 Adjustable

| Product Code | Exterior Finish | Baffle Finish | Diffuser | Optics | Colour Temperature | Control Options |
|--------------|----------------------|------------------------------|------------------------------------|-----------------|--------------------|--|
| LWAL-G5-TT | | | | | | |
| | MBK - Matte Black | CH - Chrome | AD - Asymmetric Diffuser | 15 - 15° | 27K - 2700K | PAM - Powered by Alina Master (24V) |
| | MWH - Matte White | GBK - Glossy Black | CD - Clear Diffuser | 30 - 30° | 30K - 3000K | LUWA - Smart LED LUWA Ecosystem |
| | CU - Custom 🗱 | GWH - Glossy White | SD - Square Diffuser | 45 - 45° | 35K - 3500K | |
| | | GD - Gold | NA - None | | 40K - 4000K | |
| | | MBK - Matte Black | | | CU - Custom | |
| | | MWH - Matte White | | | | |
| | | ROGD - Rose Gold | | | | |
| | | CU - Custom 🗱 | | | | |

* Min. Qty and additional fees may apply.


Additional Ordering Information

| Notes | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |




PROJECT NAME TYPE QTY


Dimensions

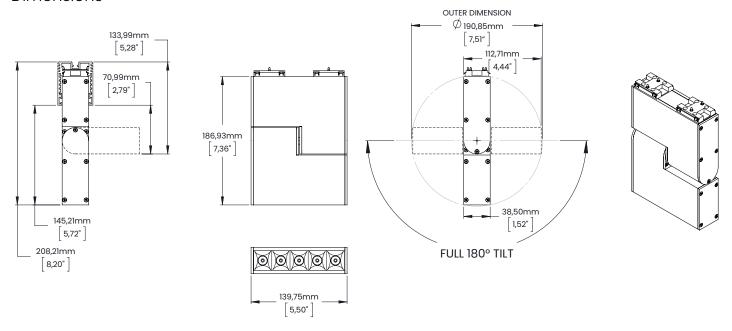


Photometrics Data



15° - 4000K



30° – 4000K



45° - 4000K

Compatible With



<u>Alina Master Trimless</u>



Alina Master Surface Mounted



Alina Master Suspended

