

TYPE:

Connor Profile

Available in a variety of light intensities and application methods, our Low Voltage Linear Solutions are widely versatile. They can be used either for their functionality, as design elements in a room or both.



Highlights

Mounting	Surface Mounted with invisible bracket or double sided tape		
Material	I Aluminum Extrusion (6063-T5)		
Features	Features Small, discreet, invisible mounting & easy to install		
Recommended for	Recommended for Corner application, cove lighting, under cabinet & woodworks		

MWH - Matte White

Aluminum Profile Colour



15.1mm

[,59"]

Lens : CF/WF



MBK - Matte Black



CU - Custom; Specify RALK7 colour

Connor Profile

Dimensions

13.49mm [,53"]

Ordering Guide

13.49mm

,53"

Ex: LWCR-FIE-48IN-MBK-CF-3MT

Product Code	Lengt	th Alumi	inum Profile Colour		Lens Options		Installation
LWCR-FIE							
	48IN 48in 96iN 96in	in MBK MWH	Clear Anodized Matte Black Matte White Custom (1)	WF	Clear Frosted Lens White Frosted Lens None	CRC	3M Tape Insert Clip None
Each profile is provided with a pair of endcaps including: 1 X Endcap without Hole 1 X Endcap with Hole			(1) Specify RALK7 code		Refer to page 2 for Lens Options		

Notes



OFFICE AND SHOWROOM 155 Fortin Street, Suite 180, Quebec City, QC GIM 3M2, Canada

Technical Information Lens Options



CF/WF Clear Frosted - White Frosted

LED Visibility & Light Loss Factor


CF Clear Frosted Lens Visible Light Loss: 8.5%



WF White Frosted Lens Barely Visible Light Loss: 23.5%

Installation Type


ЗМ Таре



Details and Ordering

Code	3MT-P91-002
Mounting	Double sided tape
Quantity	Varies according to ordered length
Notes	LW recommends applying the tape to the entire length of the profile

Insert Clip



Code	BRK-P19-009
Mounting	Surface Mounted
Quantity	Varies according to ordered length
Notes	Secure with Pin or Flat Head Screws




OFFICE AND SHOWROOM 155 Fortin Street, Suite 180, Quebec City, QC G1M 3M2, Canada

With Hole (Left)


Technical Information Endcaps

Without Hole (Left)

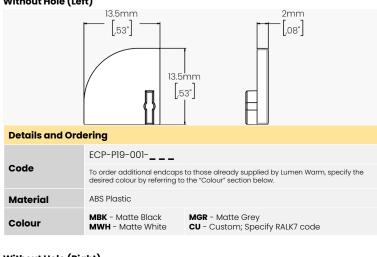

2mm

Without Hole (Right) 13.5mm

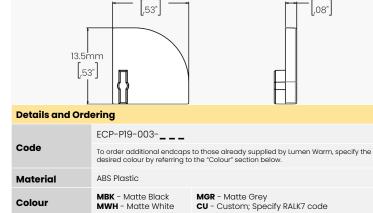

	Ø 5.25mm	F			
Details and Ord	ering				
	ECP-P19-002				
Code	To order additional endcaps to those already supplied by Lumen Warm, specify the desired colour by referring to the "Colour" section below.				
Material	ABS Plastic				
Colour	MBK - Matte Black MGR - Matte Grey MWH - Matte White CU - Custom; Specify RALK7 code				
With Hole (Right	Ø 5.25mm				
	[,21"] 7				
Details and Ord	ering				
	ering ECP-P19-004				
	ECP-P19-004	to those already supplied by Lumen Warm, specify the the "Colour" section below.			
Details and Ord Code Material	ECP-P19-004 To order additional endcaps				



OFFICE AND SHOWROOM 155 Fortin Street, Suite 180, Quebec City, QC GIM 3M2, Canada

Technical Information Available LED Strips

Static White (Click for linked document)	Lumen Output	Consumption
LWHPC120	120lm/ft - 393.6lm/m	0.91W/ft - 3W/m
LWHPC290	2901m/ft - 951.21m/m	2.59W/ft - 8.5W/m
LWHPC420	420lm/ft - 1377.6lm/m	3.51W/ft - 11.52W/m
LWHPC700	700lm/ft - 2296lm/m	5.85W/ft - 19.2W/m
<u>LWHP900</u>	900lm/ft - 2952lm/m	6.59W/ft - 21.6W/m
<u>LWHE1150</u>	1150lm/ft - 3772lm/m	7.32W/ft - 24W/m
<u>LWHE1400</u>	1400lm/ft - 4592lm/m	8.78W/ft - 28.8W/m
Dim to Warm (Click for linked document)	Lumen Output	Consumption
LWD2W480	480lm/ft - 1574.4lm/m	5.27W/ft - 17.28W/m
Tunable White (Click for linked document)	Lumen Output	Consumption
<u>LWTW220</u>	220lm/ft - 721.6lm/m	3.05W/ft - 10W/m
<u>LWTW300</u>	300lm/ft - 984lm/m	4.57W/ft - 15W/m
RGBW (Click for linked document)	Lumen Output	Consumption
LWRGBW250	250lm/ft - 820lm/m	4.68W/ft - 15.36W/m

TYPE:



OFFICE AND SHOWROOM 155 Fortin Street, Suite 180, Quebec City, QC G1M 3M2, Canada