



Myla Profile


Available in a variety of light intensities and application methods, our Low Voltage Linear Solutions are widely versatile. They can be used either for their functionality, as design elements in a room or both.



Highlights

Mounting	Recessed in dry wall or hard surface
Material	Aluminum Extrusion (6063-T5)
Features	Great accent lighting & long-run step lighting
Recommended for	Common spaces & step lighting

Dimensions

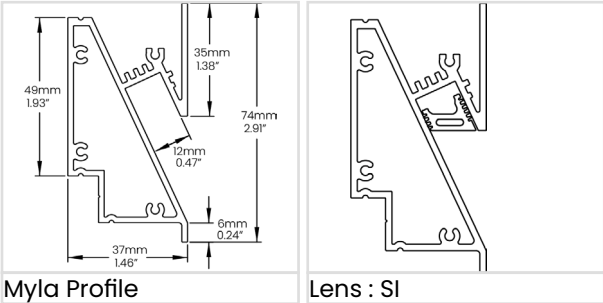


Myla Profile

Lens : SI

Aluminum Profile Colour



ACL - Clear Anodized



MBK - Matte Black



MWH - Matte White




CU - Custom; Specify RALK7 colour

Ordering Guide

Ex : LWMY-FIE-48IN-MBK-SI-BRKT

Product Code	Length	Aluminum Profile Colour	Lens Options	Installation	
LWMY-FIE					
	48IN 48in 96IN 96in	ACL Clear Anodized MBK Matte Black MWH Matte White CU Custom (1)	SI Silicone Lens NA None	BRKT Back Installation Bracket NA None	
Each profile is provided with a pair of endcaps including: 1 X Endcap without Hole 1 X Endcap with Hole		(1) Specify RALK7 code	Refer to page 2 for Lens Options	Supplied by Lumen Warm	
				Length (in)	Number of Mounting Brackets
				0-48 48-84 84-96	2 3 4

Notes



Technical Information

Lens Options



SI
Silicone Lens


LED Visibility & Light Loss Factor



CF
Silicone Lens
Diffused
Light Loss: 57%

Installation Details

Back Installation Bracket

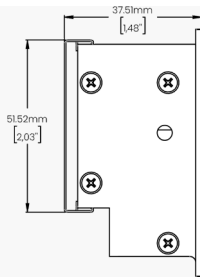


Details and Ordering

Code	BRK-P19-010
Mounting	Recessed in dry wall or hard surface
Quantity	Varies according to ordered length
Notes	LW recommends the use of #6 - 5/8" screws, not included, for their installation

Endcaps


Left

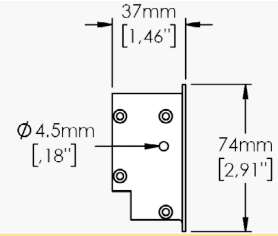

Details and Ordering

Code	ECP-P19-006- _ _ _	
Code	To order additional endcaps to those already supplied by Lumen Warm, specify the desired colour by referring to the "Colour" section below.	
Material	Aluminum	
Colour	MBK - Matte Black MWH - Matte White	MGR - Matte Grey CU - Custom; Specify RALK7 code

Right

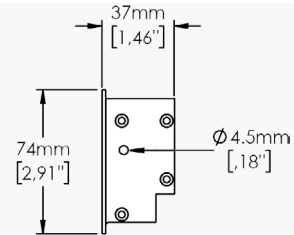

Details and Ordering

Code	ECP-P19-008- _ _ _	
Code	To order additional endcaps to those already supplied by Lumen Warm, specify the desired colour by referring to the "Colour" section below.	
Material	Aluminum	
Colour	MBK - Matte Black MWH - Matte White	MGR - Matte Grey CU - Custom; Specify RALK7 code

Technical Information

Available LED Strips

Static White (Click for linked document)	Lumen Output	Consumption
LWHPC120	120lm/ft - 393.6lm/m	0.91W/ft - 3W/m
LWHPC290	290lm/ft - 951.2lm/m	2.59W/ft - 8.5W/m
LWHPC420	420lm/ft - 1377.6lm/m	3.51W/ft - 11.52W/m
LWHPC700	700lm/ft - 2296lm/m	5.85W/ft - 19.2W/m
LWHP900	900lm/ft - 2952lm/m	6.59W/ft - 21.6W/m
LWHE1150	1150lm/ft - 3772lm/m	7.32W/ft - 24W/m
LWHE1400	1400lm/ft - 4592lm/m	8.78W/ft - 28.8W/m
Dim to Warm (Click for linked document)	Lumen Output	Consumption
LWD2W480	480lm/ft - 1574.4lm/m	5.27W/ft - 17.28W/m
Tunable White (Click for linked document)	Lumen Output	Consumption
LWTW220	220lm/ft - 721.6lm/m	3.05W/ft - 10W/m
LWTW300	300lm/ft - 984lm/m	4.57W/ft - 15W/m
RGBW (Click for linked document)	Lumen Output	Consumption
LWRGBW250	250lm/ft - 820lm/m	4.68W/ft - 15.36W/m