

Palazo Master Profile

Available in a variety of light intensities and application methods, our Low Voltage Linear Solutions are widely versatile. They can be used either for their functionality, as design elements in a room or both.




Highlights


Mounting	Recessed with Spring Bracket or with Phantom Bracket
Material	Aluminum Extrusion (6063-T5)
Features	Easy to install & optimal diffusion
Recommended for	Architectural recessed linear, flexible lighting system & linear patterns



Dimensions

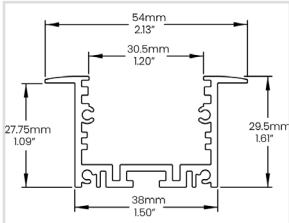

Palazo Master Profile

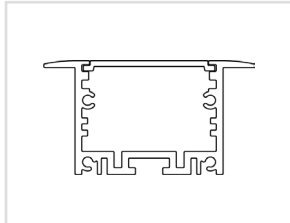


Lens : WFI

Aluminum Profile Colour



ACL - Clear Anodized



MBK - Matte Black



MWH - Matte White



CU - Custom; Specify RALK7 colour

Ordering Guide

Ex : LWPAMP-FIE-48IN-MBK-WFI-RCDSB

Product Code	Length	Aluminum Profile Colour	Lens Options	Installation								
LWPAMP-FIE												
	48IN 48in 96IN 96in	ACL Clear Anodized MBK Matte Black MWH Matte White CU Custom (1)	WFI White Frosted Inserted Lens NA None	RCDSB Recessed with Spring Bracket PMBK Recessed with Phantom Bracket NA None								
Each profile is provided with a pair of endcaps including: 1 X Endcap without Hole 1 X Endcap with Hole		(1) Specify RALK7 code	Refer to page 2 for Lens Options	Supplied by Lumen Warm <table border="1"> <tr> <th>Length (in)</th> <th>Number of Mounting Brackets</th> </tr> <tr> <td>0-48</td> <td>2</td> </tr> <tr> <td>48-84</td> <td>3</td> </tr> <tr> <td>84-96</td> <td>4</td> </tr> </table>	Length (in)	Number of Mounting Brackets	0-48	2	48-84	3	84-96	4
Length (in)	Number of Mounting Brackets											
0-48	2											
48-84	3											
84-96	4											

Notes

Technical Information

Lens Options



WFI

White Frosted Inserted Lens

LED Visibility & Light Loss Factor




WFI

White Frosted Inserted Lens
Barely Visible
Light Loss: 23.5%

Installation Type


Recessed with Spring Bracket

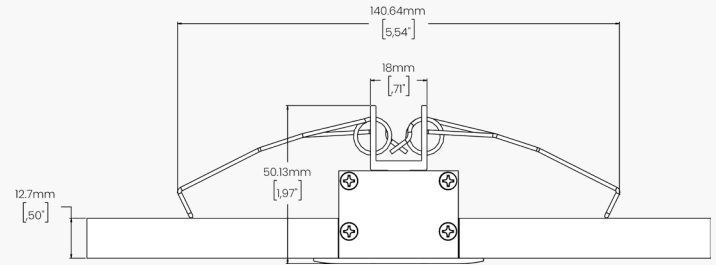

Details and Ordering

Code	BRK-PI0-001
Mounting	Recessed
Quantity	A bracket every 24in
Notes	Handle carefully, springs can cause injuries or damage the ceiling if released abruptly

Recessed with Phantom Bracket

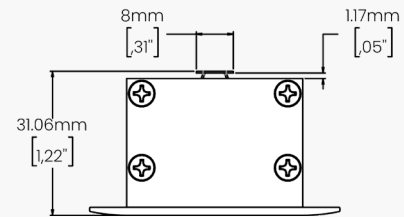


Details and Ordering

Code	BRK-PI3-001
Mounting	Recessed
Quantity	A bracket every 24in
Notes	LW recommends the use of #6 - 5/8" screws, not included, for their installation

Technical Information

Endcaps


Without Hole

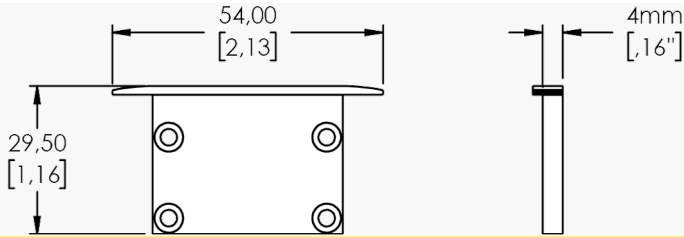

Details and Ordering

Code	ECP-P16-001- _ _ _	
	To order additional endcaps to those already supplied by Lumen Warm, specify the desired colour by referring to the "Colour" section below.	
Material	Aluminum	
Colour	MBK - Matte Black MWH - Matte White	MGR - Matte Grey CU - Custom; Specify RAL7 code

With Hole

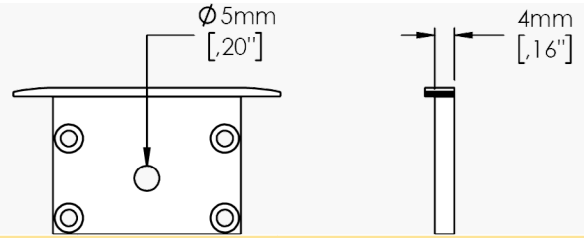

Details and Ordering

Code	ECP-P16-002- _ _ _	
	To order additional endcaps to those already supplied by Lumen Warm, specify the desired colour by referring to the "Colour" section below.	
Material	Aluminum	
Colour	MBK - Matte Black MWH - Matte White	MGR - Matte Grey CU - Custom; Specify RAL7 code

Available LED Strips

Static White (Click for linked document)	Lumen Output	Consumption
LWHPC120	120lm/ft - 393.6lm/m	0.91W/ft - 3W/m
LWHPC290	290lm/ft - 951.2lm/m	2.59W/ft - 8.5W/m
LWHPC420	420lm/ft - 1377.6lm/m	3.51W/ft - 11.52W/m
LWHPC700	700lm/ft - 2296lm/m	5.85W/ft - 19.2W/m
LWHP900	900lm/ft - 2952lm/m	6.59W/ft - 21.6W/m
LWHE1150	1150lm/ft - 3772lm/m	7.32W/ft - 24W/m
LWHE1400	1400lm/ft - 4592lm/m	8.78W/ft - 28.8W/m
Dim to Warm (Click for linked document)	Lumen Output	Consumption
LWD2W480	480lm/ft - 1574.4lm/m	5.27W/ft - 17.28W/m
Tunable White (Click for linked document)	Lumen Output	Consumption
LWTW220	220lm/ft - 721.6lm/m	3.05W/ft - 10W/m
LWTW300	300lm/ft - 984lm/m	4.57W/ft - 15W/m
RGBW (Click for linked document)	Lumen Output	Consumption
LWRGBW250	250lm/ft - 820lm/m	4.68W/ft - 15.36W/m