

Rocco Profile




Available in a variety of light intensities and application methods, our Low Voltage Linear Solutions are widely versatile. They can be used either for their functionality, as design elements in a room or both.



Highlights

Mounting	Surface mounted with phantom bracket or double sided tape
Material	Aluminum Extrusion (6063-T5)
Features	Invisible mounting, easy to install & optimal diffusion
Recommended for	Surface mounted lighting fixture, general lighting, under cabinet, woodworks

Dimensions

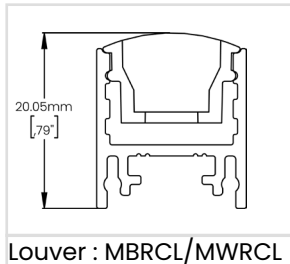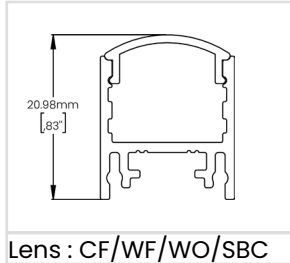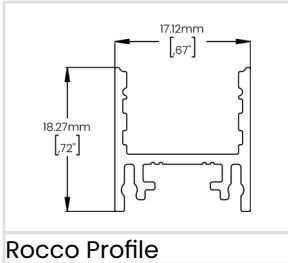

Aluminum Profile Colour




Ordering Guide

Ex : LWRC-FIE-48IN-MBK-CF-3MT


Product Code	Length	Aluminum Profile Colour	Lens Options	Installation								
LWRC-FIE												
	48IN 4in 96IN 8in	ACL Clear Anodized MBK Matte Black MWH Matte White CU Custom (1)	CF Clear Frosted Lens WF White Frosted Lens WO White Opal Lens SBC Smoked Black Lens (2) MBRCL Matte Black Rectangular Louver MWRCL Matte White Rectangular Louver NA None	3MT 3M Tape SMDBK Surface Mounted With Bracket NA None								
Each profile is provided with a pair of endcaps including: 1 X Endcap without Hole 1 X Endcap with Hole		(1) Specify RALK7 code	Refer to page 2 for Lens Options (2) For pixelation free visuals, Lumen Warm strongly recommends the use of 900lm/ft LEDs.	Supplied by Lumen Warm <table border="1"> <thead> <tr> <th>Length (in)</th> <th>Number of Mounting Brackets</th> </tr> </thead> <tbody> <tr> <td>0-48</td> <td>2</td> </tr> <tr> <td>48-84</td> <td>3</td> </tr> <tr> <td>84-96</td> <td>4</td> </tr> </tbody> </table>	Length (in)	Number of Mounting Brackets	0-48	2	48-84	3	84-96	4
	Length (in)	Number of Mounting Brackets										
0-48	2											
48-84	3											
84-96	4											

Notes




Technical Information

Lens Options




CF/WF/WO
Clear Frosted - White Frosted -
White Opal Lens



SBC
Smoke Black Lens



MWRCL
Matte White Rectangular Louver



MBRCL
Matte Black Rectangular Louver

LED Visibility & Light Loss Factor



CF
Clear Frosted Lens
Visible
Light Loss: 8.5%



WF
White Frosted Lens
Barely Visible
Light Loss: 23.5%



WO
White Opal Lens
Diffused
Light Loss: 37.5%



SBC
Smoke Black Lens
Barely Visible
Light Loss: 70%




MWRCL
Matte White Rectangular Louver
Visible
Light Loss: 4%



MBRCL
Matte Black Rectangular Louver
Visible
Light Loss: 8%

Installation Type


3M Tape

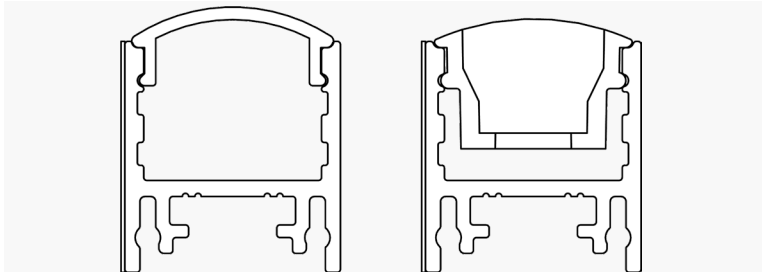

Details and Ordering

Code	3MT-P9I-002
Mounting	Double sided tape
Quantity	Varies according to ordered length
Notes	LW recommends applying the tape to the entire length of the profile

Surface Mounted With Bracket

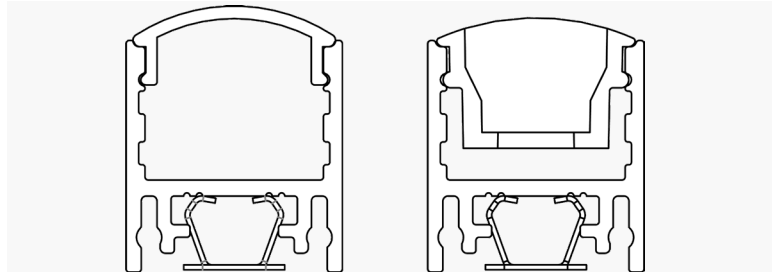


Details and Ordering

Code	BRK-PI3-001
Mounting	Surface Mounted with Bracket
Quantity	A bracket every 24in
Notes	LW recommends the use of #6 - 5/8" screws, not included, for their installation

Technical Information

Endcaps


Without Hole for Lens : CF/WF/WO/MWRCL/MBRCL

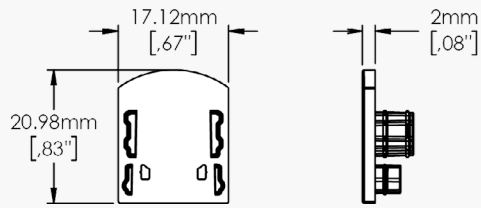

Details and Ordering

Code	ECP-P13-027- _ _ _	
	To order additional endcaps to those already supplied by Lumen Warm, specify the desired colour by referring to the "Colour" section below.	
Material	ABS Plastic	
Colour	MBK - Matte Black MWH - Matte White	MGR - Matte Grey CU - Custom; Specify RALK7 code

With Hole for Lens : CF/WF/WO/MWRCL/MBRCL

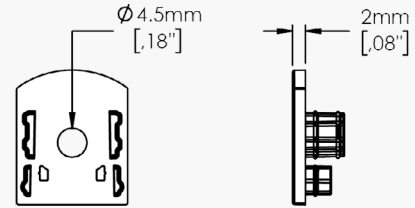


Details and Ordering

Code	ECP-P13-028- _ _ _	
	To order additional endcaps to those already supplied by Lumen Warm, specify the desired colour by referring to the "Colour" section below.	
Material	ABS Plastic	
Colour	MBK - Matte Black MWH - Matte White	MGR - Matte Grey CU - Custom; Specify RALK7 code

Joining Accessories


Straight

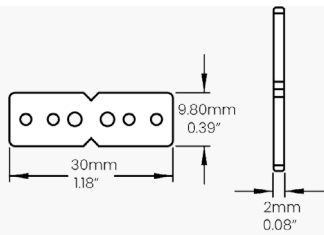

Details and Ordering

Code	JNR-P91-001
-------------	-------------


Flat Corner

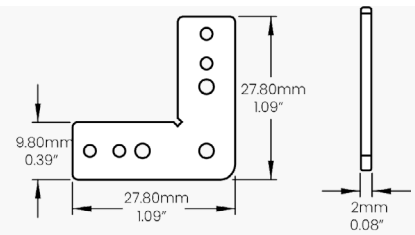

Details and Ordering

Code	JNR-P91-002
-------------	-------------

Angle Corner

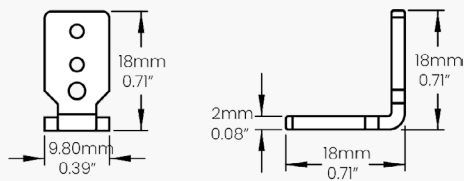

Details and Ordering

Code	JNR-P91-003
-------------	-------------

Technical Information

Available LED Strips

Static White (Click for linked document)	Lumen Output	Consumption
LWHPC120	120lm/ft - 393.6lm/m	0.91W/ft - 3W/m
LWHPC290	290lm/ft - 951.2lm/m	2.59W/ft - 8.5W/m
LWHPC420	420lm/ft - 1377.6lm/m	3.51W/ft - 11.52W/m
LWHPC700	700lm/ft - 2296lm/m	5.85W/ft - 19.2W/m
LWHP900	900lm/ft - 2952lm/m	6.59W/ft - 21.6W/m
LWHE1150	1150lm/ft - 3772lm/m	7.32W/ft - 24W/m
LWHE1400	1400lm/ft - 4592lm/m	8.78W/ft - 28.8W/m
Dim to Warm (Click for linked document)	Lumen Output	Consumption
LWD2W480	480lm/ft - 1574.4lm/m	5.27W/ft - 17.28W/m
Tunable White (Click for linked document)	Lumen Output	Consumption
LWTW220	220lm/ft - 721.6lm/m	3.05W/ft - 10W/m
LWTW300	300lm/ft - 984lm/m	4.57W/ft - 15W/m
RGBW (Click for linked document)	Lumen Output	Consumption
LWRGBW250	250lm/ft - 820lm/m	4.68W/ft - 15.36W/m