PROJECT: TYPE: QTY:



Venga Slim Trimless Profile


The Venga Series is a family of linear systems allowing for a direct or indirect, as well as a combination of both, lighting of any room. It is available in a variety of light intensity options as well as numerous applications including, but not limited to, surface or wall mounted.



Highlights

| Mounting | Recessed with Mud-In Flange |
|-----------------|------------------------------------|
| Material | Aluminum Extrusion (6063-T5) |
| Features | Discreet & optimal diffusion |
| Recommended for | General lighting & linear patterns |

Dimensions



Aluminum Profile Colour



Ordering Guide

Ex: LWVGSMTL-FIE-48IN-MF-WFC

| Product Code | Length | Aluminum Profile Colour | Lens Options |
|--|------------------------|-------------------------|--|
| LWVGSMTL-FIE | | | |
| | 48IN 48in 96IN 96in | MF Mill Finish | WFC White Frosted Clipped Lens NA None |
| Each profile is provided with a pair of endcaps including: 2 X Endcaps without Hole | | | Refer to page 2 for Lens Options |

Notes



PROJECT: TYPE: QTY:

Technical Information Lens Options



WFCWhite Frosted Clipped Lens


LED Visibility & Light Loss Factor

WFC

White Frosted Clipped Lens Diffused Light Loss: 35%


Installation Type

With Screws

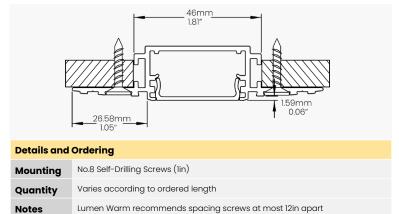

Endcaps

Without Hole

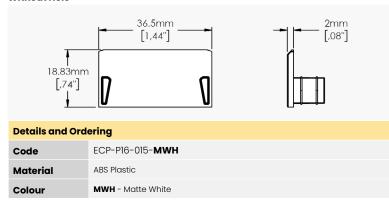

Available LED Strips

| 7.1 4.1 4.1 5.1 5.1 | | | | | |
|---|-----------------------|---------------------|--|--|--|
| Static White (Click for linked document) | Lumen Output | Consumption | | | |
| LWHPC120 | 120lm/ft - 393.6lm/m | 0.91W/ft - 3W/m | | | |
| LWHPC290 | 290lm/ft - 951.2lm/m | 2.59W/ft - 8.5W/m | | | |
| LWHPC420 | 420lm/ft - 1377.6lm/m | 3.51W/ft - 11.52W/m | | | |
| LWHPC700 | 700lm/ft - 2296lm/m | 5.85W/ft - 19.2W/m | | | |
| LWHP900 | 900lm/ft - 2952lm/m | 6.59W/ft - 21.6W/m | | | |
| <u>LWHE1150</u> | 1150lm/ft - 3772lm/m | 7.32W/ft - 24W/m | | | |
| <u>LWHE1400</u> | 1400lm/ft - 4592lm/m | 8.78W/ft - 28.8W/m | | | |
| Dim to Warm (Click for linked document) | Lumen Output | Consumption | | | |
| LWD2W480 | 480lm/ft - 1574.4lm/m | 5.27W/ft - 17.28W/m | | | |
| Tunable White (Click for linked document) | Lumen Output | Consumption | | | |
| LWTW220 | 220lm/ft - 721.6lm/m | 3.05W/ft - 10W/m | | | |
| LWTW300 | 300lm/ft - 984lm/m | 4.57W/ft - 15W/m | | | |
| RGBW (Click for linked document) | Lumen Output | Consumption | | | |
| LWRGBW250 | 250lm/ft - 820lm/m | 4.68W/ft - 15.36W/m | | | |



TOLL FREE 1 866 586 3692 TEL. 514 286 0227 info@lumenwarm.com OFFICE AND SHOWROOM 155 Fortin Street, Suite 180, Quebec City, QC G1M 3M2, Canada LAST UPDATE 17/07/2024