

PROJECT NAME


TYPE

QTY



# ALINA INSERT ADJUSTABLE

Our Alina family offers you an architectural solution that is customizable to your needs and can be adapted to fit almost any space, including a winding hallway full of twists and turns. An ever-growing number of fixtures are compatible with the Alina and can be changed as trends and your needs evolve in time. These fixtures can be controlled individually – or as a whole group – with most of the smart home controllers on the market.

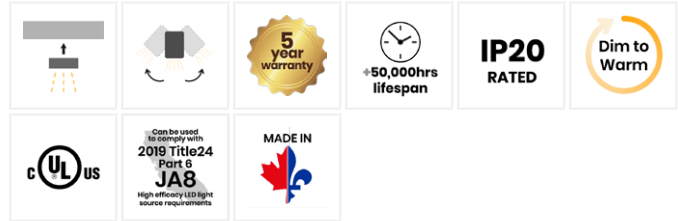


<b>Colour Temperature</b>	2700K, 3000K, 3500K, 4000K, Dim To Warm
<b>CRI*</b>	Up to 95, see Spec Sheet for more details
<b>Lumen Output</b>	Up to 1400lm/ft, see Spec Sheet for more details
<b>Lumen/Watt</b>	Up to 160lm/W, see Spec Sheet for more details

\*Please note this information is based off a 4000K LED Source.

<b>Input Voltage</b>	Alina Master, 24VDC
<b>Constant Voltage</b>	24V
<b>Consumption</b>	Up to 8.78W/ft, see Spec Sheet for more details
<b>Dimming Options</b>	Alina Master, LUWA Smart LED Driver
<b>Material</b>	Aluminum


\*Please note this information is based off a 4000K LED Source.

## EXTERIOR FINISH



Matte White   Matte Black   Custom

## COLOUR TEMPERATURE

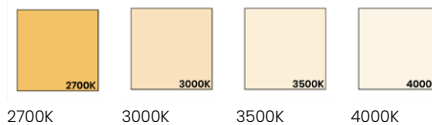

2700K   3000K   3500K   4000K



Dim to Warm (1800K - 3000K)   Dim to Warm (2700K - 4000K)   Custom



PROJECT NAME

TYPE


QTY

# ORDERING OPTIONS

## Alina Insert Adjustable

Product Code	Length	Exterior Finish	Lens Options	Lumen Package	Colour Temperature	Control Options
LWAL-INS-TT	----	---	---	-----	----	----
	<b>6IN</b> - 6in	<b>MWH</b> - Matte White	<b>WFI</b> - White Frosted Lens Inserted	<b>HPC120</b> - 120lm/ft	<b>27K</b> - 2700K	<b>PAM</b> - Powered by Alina Master (24V)
	<b>11IN</b> - 11in	<b>MBK</b> - Matte Black	<b>SBI</b> - Smoked Black Lens Inserted	<b>HPC290</b> - 290lm/ft	<b>30K</b> - 3000K	<b>LUWA</b> - Smart LED LUWA Ecosystem 
		<b>CU</b> - Custom 		<b>HPC420</b> - 420lm/ft	<b>35K</b> - 3500K	
				<b>HPC700</b> - 700lm/ft	<b>40K</b> - 4000K	
				<b>HP900</b> - 900lm/ft	<b>CU</b> - Custom	
				<b>HP1000</b> - 1000lm/ft		
				<b>HE1150</b> - 1150lm/ft		
				<b>HE1400</b> - 1400lm/ft		
				<b>D2W480</b> - Dim to Warm 480lm/ft	<b>D2W1</b> - Dim to Warm (1800K - 3000K)	
					<b>D2W6</b> - Dim to Warm (2700K - 4000K)	
					<b>CU</b> - Custom	

 Min. Qty and additional fees may apply. Specify RAL Code.

 Max. one 20W fixture per LUWA.

## Additional Ordering Information


Notes |

PROJECT NAME

TYPE

QTY

Dimensions

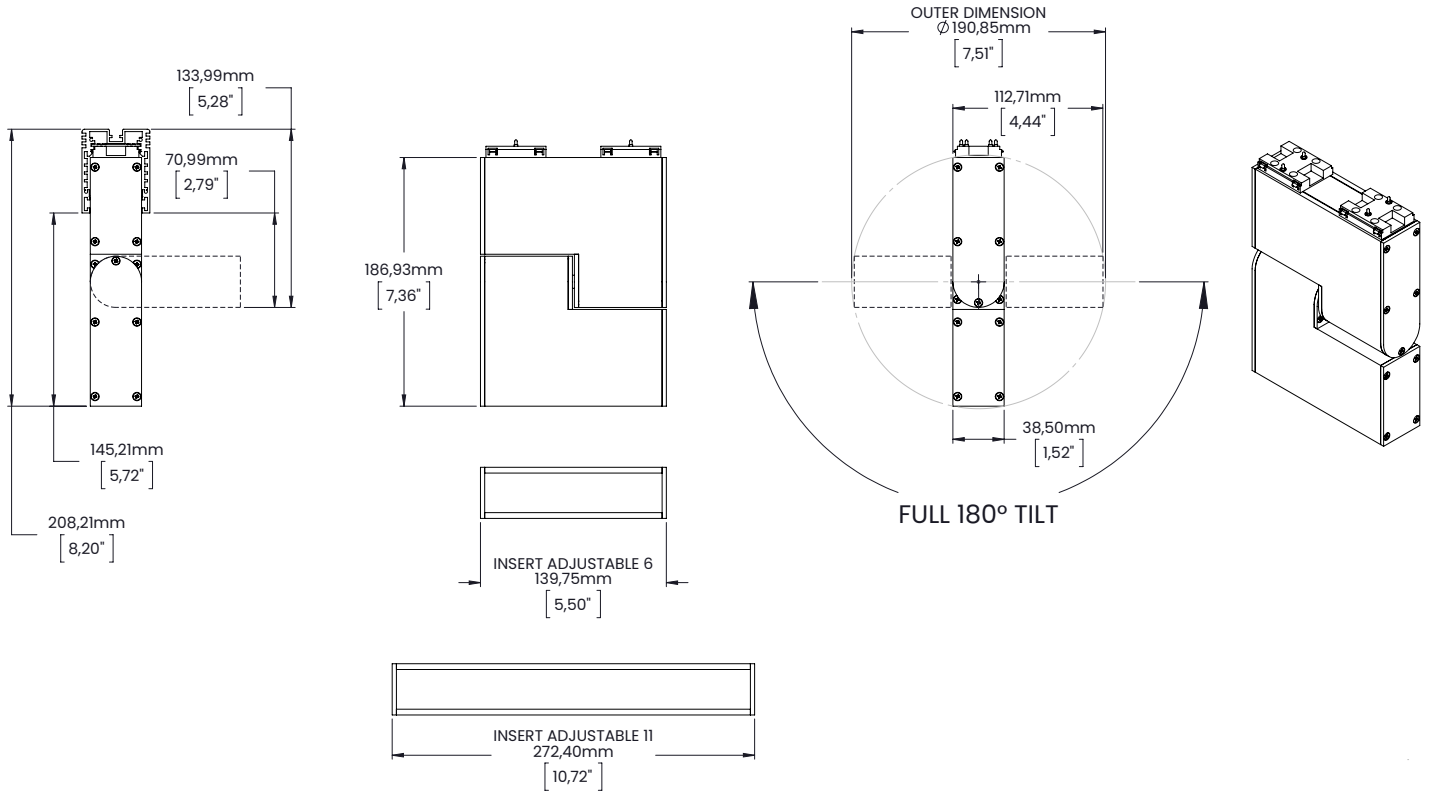

Detailed Information per Lumen Package (Consumption – Lumen/Watt – CRI)

<b>HPC120 - 120lm/ft</b>	0.91W/ft – 127lm/W – 95
<b>HPC290 - 290lm/ft</b>	2.59W/ft – 110lm/W – 95
<b>HPC420 - 420lm/ft</b>	3.51W/ft – 115lm/W – 95
<b>HPC700 - 700lm/ft</b>	5.85W/ft – 120lm/W – 95
<b>HP900 - 900lm/ft</b>	6.58W/ft – 95lm/W – 95

<b>HP1000 - 1000lm/ft</b>	7.9W/ft – 127lm/W – 95
<b>HE1150 - 1150lm/ft</b>	7.31W/ft – 157lm/W – 90
<b>HE1400 - 1400lm/ft</b>	8.78W/ft – 160lm/W – 90
<b>D2W480 - Dim to Warm 480lm/ft</b>	5.27W/ft – 92lm/W – 90

PROJECT NAME

TYPE

QTY

LED Visibility



White Frosted Lens – Diffused – Light Loss: 35%



Smoked Black Lens – Barely Visible – Light Loss: 70%

Compatible With



Alina Master Trimless



Alina Master Surface Mounted



Alina Master Suspended